



THE ASCEND® PLATFORM INSTALLATION INSTRUCTIONS


This document describes the recommended use of the ASCEND Platform.

TABLE OF CONTENTS

RACK MOUNTING	1
23" MOUNT INSTALLATION	1
CASSETTE INSTALLATION	2
PATCH CORD INSTALLATION	2
TRUNK CABLE INSTALLATION	3
CABLE MOUNTING BRACKET INSTALLATION	3
LC UNIBOOT REVERSIBILITY	3
MTP® PRO REVERSIBILITY	4

RACK MOUNTING

MATERIALS

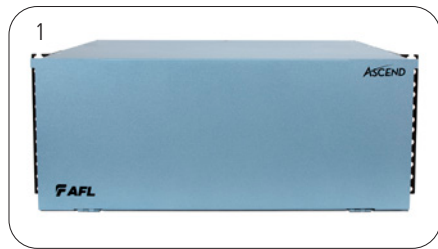

- 1. ASCEND Housing
- 2. Rack Mounting Hardware

INSTRUCTIONS

The ASCEND housing is optimized for use with a 19" rack or cabinet with standard rails that meet the EIA/ECA Standard for Cabinets, Racks, Panels, and Associated Equipment. Note that mounting in a 23" rack requires an optional mounting hardware kit. It is recommended to start from the bottom of the rack or cabinet if the intention is to completely fill the rack or cabinet with ASCEND housings.

1. Determine the desired rack position on which to mount the housing within the rack or cabinet.
2. Partially install two mounting screws at the lowest position within the selected rack position at the lowest point within the selected rack position on the rack. Be sure to leave enough space between the head of the screw and the rack rail to accommodate the thickness of the housing mounting brackets.
3. Place the housing between the rails on the rack while aligning the bottom slots of the mounting bracket over the partially installed mounting screws. Once aligned over the screws, the weight of the housing can be released. Install additional screws to the mounting bracket for stability.
4. Tighten all screws completely (Figure 1).



Figure 1

23" MOUNT INSTALLATION

1. Remove and set aside the 4 screws on the 19" mounting bracket on the ASCEND housing and remove the 19" mounting bracket (Figure 2).
2. Line up the 23" mounting bracket over the mounting holes and install the 4 screws (Figure 3).
3. Repeat for the other side.




Figure 2



Figure 3

CASSETTE INSTALLATION

This installation guide is applicable for any ASCEND cassette. Cassettes can be inserted from the front or rear of the housing. It is recommended to begin cassette installation from the bottom and fully populate each tray before moving upward.

FRONT INSTALLATION INSTRUCTIONS

1. Pull out the desired installation tray. A hard stop will be felt when the tray reaches the correct installation position (Figure 4).
2. Relative to the front of the cassette, push in on the cassette's release lever to ensure it is engaged (Figure 5).
3. Align the cassette within the guides inside of the tray and push the cassette into the tray (Figure 6).
4. To release the cassette from the front of the tray, pull out on the release lever and slide the cassette out of the tray guides (Figure 7).

Note: If desired, a hook tool can be placed in the hole on the release lever to assist in removing the cassette from the tray. Use extreme caution and care if using this method.

5. Re-engage the release lever to insert the cassette back into the tray. A click should be heard when the lever is re-engaged.



Figure 4



Figure 5



Figure 6



Figure 7

REAR INSTALLATION INSTRUCTIONS

1. Ensure that the front door of the housing is closed.
2. Open the rear door of the housing.
3. For easier access to trays in the 1RU and 2RU, remove the rear housing cover by unscrewing the two thumbscrews (Figure 8).
4. Relative to the front of the cassette, push in on the cassette's release lever to ensure it is engaged (Figure 9).
5. Align the cassette with the guides inside of the tray and push the cassette into the tray (Figure 10).
6. To release the cassette from the rear of the tray, push forward on the release lever and slide the cassette back toward you (Figure 11).
7. Re-engage the release lever to insert the cassette back into the tray. A click should be heard when the lever is re-engaged.



Figure 8



Figure 9



Figure 10



Figure 11

PATCH CORD INSTALLATION

1. Pull out the desired installation tray. A hard stop will be felt when the tray reaches the correct installation position.
2. Remove the connector dust cap. Clean connectors and adapters using AFL's Cletop Connector Cleaner or One-Click® Cleaner. Follow the instructions provided with the tools.
3. While holding the extension tab on the latch mechanism, plug the connector in to the desired port by pushing on the latch mechanism (Figure 12).
4. Route the cable one at a time through the organization rings. (Figure 13).

NOTE: Patch cords plugged in to the cassette(s) nearest the exit to the vertical cable management are routed through the ring closest to the cassette. Patch cords plugged into the second cassette are routed through the ring second closest to the cassette, and so forth.

NOTE: The cables can all be routed to one side of the housing or can be split by routing half to the left and half to the right of the housing.

5. To remove the connector, pull on the latch mechanism (Figure 14).



Figure 12



Figure 13



Figure 14

TRUNK CABLE INSTALLATION

1. If desired for the 1RU and 2RU, remove the rear housing cover by unscrewing the two thumbscrews (Figure 8).
2. Bring the trunk cable in through the desired side of the ASCEND housing .
3. Snap the Outback Clip onto the bridge lance forms. An audible click should be heard when installed correctly. It is recommended when using multiple trunk cables to begin your installation at the bridge lance forms closest to the trays and progress towards the rear of the housing (Figure 15).
4. If it is required to release the outback clip, push down on the lever and slide the clip out from the lance forms. (Figure 16).
5. With the outback clip snapped into place, remove the connector and adapter dust caps. Clean connectors and adapters using AFL's Clestop Connector Cleaner or One-Click Cleaner. Follow the instructions provided with the tools.
6. Route the fiber in an S-shape manner to make the connections to the cassettes (Figure 17).
7. Loosely applying Velcro to fiber groups provides further cable management and organization (Figure 18).
8. To provide ease in cable routing, each row should be fully populated beginning with the bottom most tray before moving upward to the next.
9. **NOTE:** The 4RU Housing features a fixed top with additional lances for mounting trunk cables. For top installation, please follow methods as noted above in steps 1-8.




Figure 15




Figure 16



Figure 17



Figure 18

CABLE MOUNTING BRACKET INSTALLATION

1. Attach the bracket base to the ASCEND housing above the brush guard using 2 of the 4 screws provided (Figure 19).
2. Secure the incoming cable to the clamp. If the cable is too narrow, wrap it with foam tape prior to insertion into the clamp and secure the cable clamp to the bracket base using 2 screws (Figure 20).




Figure 19




Figure 20

LC UNIBOOT REVERSIBILITY

1. Flip the connector over so that you are looking at the white body of the connector (Figure 21).
2. Unlatch the push-pull tab from the body of the connector by pushing the tab in the slot to the left (Figure 22).
3. Pull the push-pull tab away from the body of the connector (Figure 23).
4. Once the push-pull tab has been removed from the body, reinsert the tab on the opposite side of the connector body (Figure 24).




Figure 21




Figure 22




Figure 23




Figure 24

MTP® PRO REVERSIBILITY*

FEMALE-TO-MALE GENDER CHANGE

1. Place the connector inside of the port on the MTP Pro Field Tool that is labeled "pin." A click should be heard (Figure 25).
2. Remove the pin holder from the MTP Pro Field Tool. Ensure that the holder is populated with pins (Figure 26).
3. Place the pin holder inside of the port labeled "Exchanger" (Figure 27).
4. Remove the pin holder (Figure 28).
5. Remove the connector.



Figure 25



Figure 26



Figure 27



Figure 28

MALE-TO-FEMALE GENDER CHANGE

1. Place the connector inside of the port on the MTP Pro Field Tool that is labeled "pin." A click should be heard (Figure 29).
2. Remove the empty pin holder from the MTP Pro Field Tool (Figure 30).
3. Place the pin holder inside of the port labeled "Exchanger" (Figure 31).
4. Slide the green tool (included with the MTP Pro Field Tool) onto to the pin holder (Figure 32).
5. Squeeze down on the MTP Pro Field Tool (Figure 33).
6. Squeeze the handles on the green tool (Figure 34).
7. Pull the pin holder out of the port (Figure 35).
8. Release the MTP Pro Field Tool (Figure 36).
9. Remove the connector from the port.



Figure 29



Figure 30



Figure 31



Figure 32




Figure 33



Figure 34



Figure 35



Figure 36

POLARITY CHANGE

1. Insert the connector key up into the port on the MTP Pro Field Tool that is labeled "Polarity." A click will be heard when the connector is properly installed (Figure 37).
2. Remove the connector from the port.



Figure 37

*These instructions apply to Multimode applications only