


# 230 kV Aluminum Bolted Vibration Dampers

## DOSSERT


### **TYPE 1706 SERIES**


#### **Bus Vibration Dampers**

Tubular bus dampers are designed to control Aeolian or wind-induced vibration in long bus spans; the dampers have been proven both in the laboratory and in field service to be the most effective method of controlling tubular bus vibration. The dampers are faster and easier to install than the old method of inserting "scrap" cable into the tubular bus runs. Also, the dampers find applications for correcting a vibration problems in existing substations.





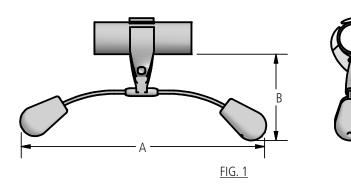

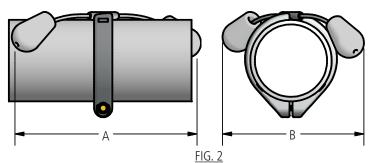

## **Ordering Information**

CATALOC NUMBER	SPS	FIGURE NUMBER	DIMENSIONS IN INCHES			
CATALOG NUMBER		FIGURE NUMBER	Α	В	BOLT SIZE	
1706-190	1-1/2	1	29.5	9.9	5/8-11	
1706-238	2	1	29.5	9.9	5/8-11	
1706-288	2-1/2	1	29.6	10.2	5/8-11	
1706-350	3	1	29.6	10.3	3/4-10	
1706-008	3	2	28.0	12.6	1/2-13	
1706-009	3-1/2	2	27.8	13.2	1/2-13	
1706-010	4	2	27.6	13.6	1/2-13	
1706-012	5	2	26.8	15.4	1/2-13	
1706-013	6	2	26.2	17.8	1/2-13	
1706-014	8 O.D.	2	24.8	18.6	1/2-13	



# 230 kV Aluminum Bolted Vibration Dampers


## DOSSERT

# **TYPE 1706**Bus Vibration Dampers

Vibration dampers for universal angle bus conductor (UABC) and integral web channel bus conductor (IWCB) are specifically designed to control Aeolian or wind-induced vibration in long bus spans. The dampers provide a fast, economical method of damping vibration. Installation is easy; the IWCB damper clamps to the bus by means of a bolt and clamp nut while the UABC damper bolts directly to the bus.



Determine catalog number based on the bus conductor size being used. Ex: A bus vibration damper for 4"x4" IWCB, the complete catalog number is: 1706-129.

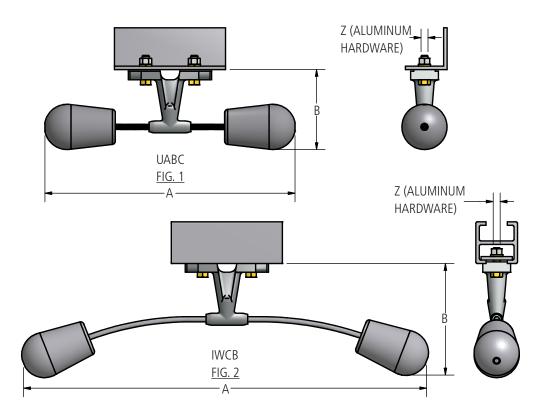

### **Ordering Information**

CONDUCTOR SIZE	FIGURE NUMBER	CATALOG NUMBER	DIMENSIONS IN INCHES		
IN	FIGURE NUMBER		Α	В	BOLT SIZE
3-1/4 x 3-1/4 Thru	1	1706-123	15.5	5.7	1/2-13
5 x 5 UABC	'				
4 x 4 Thru	2	1706-129	29	10.1	1/2-13
9 x 9 IWCB					