




Bonding Clamps for OPGW

The Bonding Clamp is used to ground OPGW to the tower by attaching to the tower grounding wire. Specific requirements vary from one utility to another. The product is an aluminum extruded parallel groove clamp. The clamp is available with one or two bolts, depending on the application requirements.


Features

- Hardware is high strength aluminum
- Clamp grooves are coated with NO-OX-ID and prefilled with Alnox.
- Recommended bolt torque: 25 ft.-lbs.

Specifications

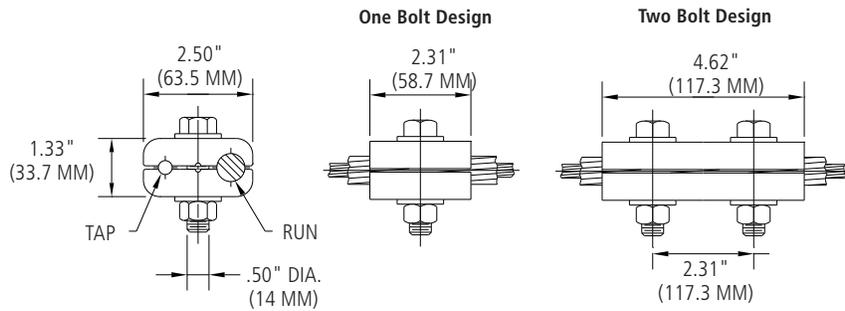

Ordering Information

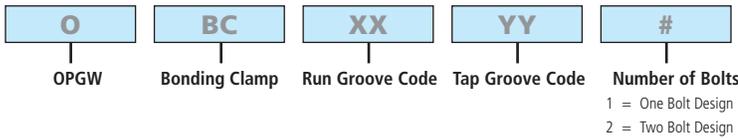

GROOVE CODE	GROOVE RANGE (inches)
A1	.112" - .126"
B1	.127" - .141"
C1	.142" - .156"
D1	.157" - .171"
E1	.172" - .186"
F1	.187" - .201"
G1	.202" - .216"
H1	.217" - .231"
J1	.232" - .246"
K1	.247" - .261"
L1	.262" - .276"
M1	.277" - .291"
N1	.292" - .306"
P1	.307" - .321"
Q1	.322" - .336"
R1	.337" - .351"
S1	.352" - .366"

GROOVE CODE	GROOVE RANGE (inches)
T1	.367" - .381"
U1	.382" - .396"
V1	.397" - .411"
W1	.412" - .424"
X1	.425" - .440"
Y1	.441" - .454"
Z1	.455" - .464"
A2	.465" - .480"
B2	.481" - .495"
C2	.496" - .510"
D2	.511" - .525"
E2	.526" - .540"
F2	.541" - .555"
G2	.556" - .570"
H2	.571" - .585"
J2	.586" - .600"
K2	.601" - .615"

GROOVE CODE	GROOVE RANGE (inches)
L2	.616" - .630"
M2	.631" - .645"
N2	.646" - .660"
P2	.661" - .675"
Q2	.676" - .690"
R2	.691" - .705"
S2	.706" - .720"
T2	.721" - .735"
U2	.736" - .750"
V2	.751" - .765"
W2	.766" - .780"
X2	.781" - .795"
Y2	.796" - .810"
Z2	.811" - .825"
A3	.826" - .840"
B3	.841" - .855"

NOTE: For installation instructions, see page 148.