



## DOSSERT<sup>®</sup> MICON Type MCC

A multi-outlet pre-insulated connector for secondary network cables. Cables are readily installed and are securely connected to each outlet position by the use of cable receptacles type MA. Outlet sizes on listed connectors will accommodate cable sizes at 600 MCM. For connectors required to join larger than 600 MCM cables, indicate catalog number of selected unit and refer to MICON ORDERING DATA sheet. Unless otherwise specified, connectors are insulated with GA-20 rubber compound. Type P plugs of the same material are supplied for one quarter of the number of outlets.

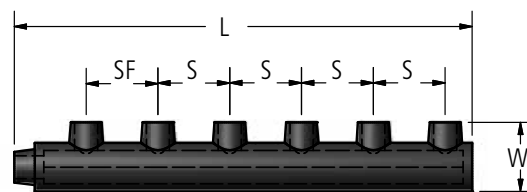

### Ordering Information

CATALOG NUMBER	CURRENT RATING AMPERES	NUMBER OF OUTLETS	DIMENSIONS IN INCHES			
			L	SF	S	W
MCC150-2	1500	2	4 1/4	-	-	3 1/16
MCC150-3	1500	3	7 1/4	3	-	3 1/16
MCC150-4	1500	4	10 1/4	3	3	3 1/16
MCC150-5	1500	5	13 1/4	3	3	3 1/16
MCC150-6	1500	6	16 1/4	3	3	3 1/16
MCC150-7	1500	7	19 1/4	3	3	3 1/16
MCC150-8	1500	8	22 1/4	3	3	3 1/16
MCC150-9	1500	9	25 1/2	3	3	3 1/16
MCC250-2	2500	2	4 13/16	-	-	3 3/8
MCC250-3	2500	3	8 5/16	3 1/2	-	3 3/8
MCC250-4	2500	4	11 13/16	3 1/2	3 1/2	3 3/8
MCC250-5	2500	5	15 5/16	3 1/2	3 1/2	3 3/8
MCC250-6	2500	6	18 13/16	3 1/2	3 1/2	3 3/8
MCC250-7	2500	7	22 5/16	3 1/2	3 1/2	3 3/8
MCC250-8	2500	8	25 13/16	3 1/2	3 1/2	3 3/8
MCC250-9	2500	9	29 5/16	3 1/2	3 1/2	3 3/8
MCC300-2	3000	2	4 13/16	-	-	4
MCC300-3	3000	3	8 7/16	3 5/8	-	4
MCC300-4	3000	4	11 13/16	3 5/8	3 3/8	4
MCC300-5	3000	5	15 3/16	3 5/8	3 3/8	4
MCC300-6	3000	6	18 9/16	3 5/8	3 3/8	4
MCC300-7	3000	7	21 15/16	3 5/8	3 3/8	4
MCC300-8	3000	8	25 5/16	3 5/8	3 3/8	4
MCC300-9	3000	9	28 11/16	3 5/8	3 3/8	4