


DOSSERT® TYPE 38100-EHV

Spacer is designed to be corona free for 345 kV service. Single bolt spacer is supplied for 6.5" and 8" centerline spacing.

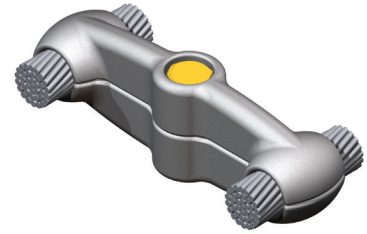


Material

Aluminum Alloy

Hardware

Yellow anodized aluminum bolts, nuts, and lockwashers.

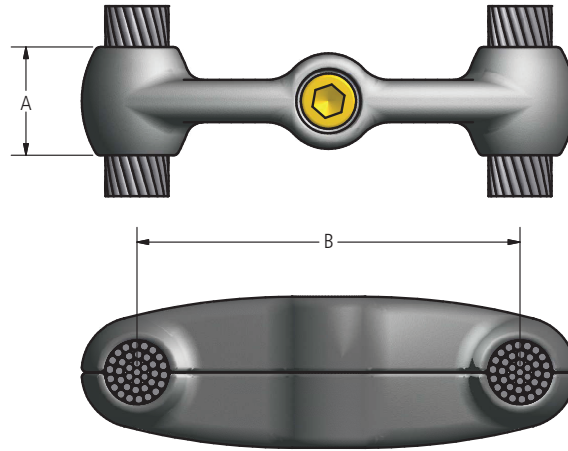

Ordering Information

CATALOG NUMBER	CABLE RANGE			DIMENSIONS IN INCHES		BOLT SIZE	NOMINAL WEIGHT LBS
	DIAMETER	AAC	ACSR	A	B		
38131EHV	.938 - 1.000	700 - 750	556.5(30/7) - 636(26/7)	1.66	6.50	5/8	1.7
38161EHV	.938 - 1.000	700 - 750	556.5(30/7) - 636(26/7)	1.66	8.00	5/8	2.7
38132EHV	1.001 - 1.062	795	636(30/19) - 795(36/1)	1.75	6.50	5/8	1.6
38162EHV	1.001 - 1.062	795	636(30/19) - 795(36/1)	1.75	8.00	5/8	1.9
38133EHV	1.063 - 1.125	900 - 954	795(45/7) - 795(24/7)	1.66	6.50	5/8	1.6
38163EHV	1.063 - 1.125	900 - 954	795(45/7) - 795(24/7)	1.66	8.00	5/8	1.9
38134EHV	1.126 - 1.187	1000 - 1033.5	795(30/19) - 954(45/7)	1.44	6.50	5/8	1.6
38164EHV	1.126 - 1.187	1000 - 1033.5	795(30/19) - 954(45/7)	1.44	8.00	5/8	1.6
38135EHV	1.188 - 1.250	1113	954(54/7) - 1033.5(54/7)	2.12	6.50	5/8	1.9
38165EHV	1.188 - 1.250	1113	954(54/7) - 1033.5(54/7)	2.12	8.00	5/8	2.0
38136EHV	1.251 - 1.312	1192.5 - 1272	1113(45/7) - 1192.5(45/7)	2.12	6.50	5/8	2.0
38166EHV	1.251 - 1.312	1192.5 - 1272	1113(45/7) - 1192.5(45/7)	2.12	8.00	5/8	1.9
38137EHV	1.313 - 1.375	1351.5 - 1351.5	1192.5(54/19) - 1272(45/7)	1.91	6.50	5/8	2.9
38167EHV	1.313 - 1.375	1351.5 - 1351.5	1192.5(54/19) - 1272(45/7)	1.91	8.00	5/8	2.0
38138EHV	1.376 - 1.437	1431 - 1510.5	1272(54/19) - 1431(45/7)	2.50	6.50	3/4	3.0
38168EHV	1.376 - 1.437	1431 - 1510.5	1272(54/19) - 1431(45/7)	2.50	8.00	3/4	3.0
38139EHV	1.438 - 1.500	1590	1431(54/19) - 1510.5(45/7)	2.50	6.50	3/4	3.4
38169EHV	1.438 - 1.500	1590	1431(54/19) - 1510.5(45/7)	2.50	8.00	3/4	3.6