



DOSSERT® TYPE WTPIC-N-V-AA, WTPIC-E-N-V-AA

Welded Internal Terminal

Welded internal terminal is designed to be corona free for 345 kV and 500 kV service.

Material

Aluminum Alloy

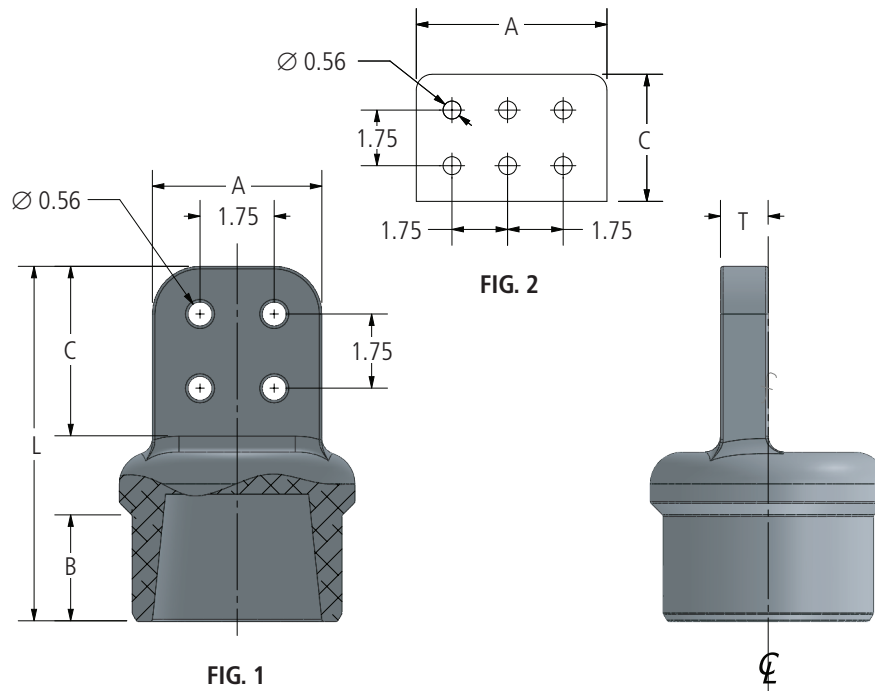

Ordering Information

CATALOG NUMBER		SPS	FIG. NO.	DIMENSIONS IN INCHES				
SCHEDULE 40	SCHEDULE 80			A	B	C	L	T
WTPIC250-4N4-V-AA	WTPIC250E-4N4-V-AA	2 1/2	1	4.00	1.50	4.00	6.88	0.63
WTPIC300-4N4-V-AA	WTPIC300E-4N4-V-AA	3	1	4.00	2.00	4.00	7.38	0.63
WTPIC300-6N4-V-AA	WTPIC300E-6N4-V-AA	3	2	6.00	2.00	4.00	7.38	0.63
WTPIC350-4N4-V-AA	WTPIC350E-4N4-V-AA	3 1/2	1	4.00	2.00	4.00	7.38	0.75
WTPIC400-4N4-V-AA	WTPIC400E-4N4-V-AA	4	1	4.00	2.31	4.00	7.75	0.75
WTPIC400-6N4-V-AA	WTPIC400E-6N4-V-AA		2	6.00	2.31	4.00	7.75	0.75
WTPIC400-6N6-V-AA	WTPIC400E-6N6-V-AA		2	6.00	2.31	6.00	7.75	0.75
WTPIC500-4N4-V-AA	WTPIC500E-4N4-V-AA	5	1	4.00	3.00	4.00	8.56	1.13
WTPIC500-6N6-V-AA	WTPIC500E-6N6-V-AA		2	6.00	2.50	6.00	8.13	0.88
WTPIC600-4N4-V-AA	WTPIC600E-4N4-V-AA	6	1	4.00	3.50	4.00	9.31	1.00
WTPIC600-6N6-V-AA	WTPIC600E-6N6-V-AA		2	6.00	3.50	6.00	9.31	1.00