

Single Trunnion Cable Support



Double Trunnion Cable Support (closed)



Double Trunnion Cable Support (open)

Trunnion Assemblies— Single and Double Cables

AFL offers trunnions with various mounting capabilities: bolted, banded or standoff. Trunnions reduce installation costs by functioning as a pull-through during installation (maximum line angle for stringing is 15° total, 7.5° per side, number of structures not to exceed 30). No block or pulley is needed provided these conditions are met.

Features

- May be used as a pull-through by removing the bushing inserts
- Double cable supports option
- High-strength aluminum
- Smaller and more compact design
- Facilitates faster installation
- Color-coded range taking inserts for easy identification
- Versatile mounting styles to fit different structure types: bolted, banded or standoff
- Banding and pole hardware supplied by customer
- Lowers the total cost of installation
- Span Length: 600 ft.—NESC Heavy
1,200 ft.—NESC Light

Ordering Information—Single Cable Support

CABLE O.D. RANGE		ESTIMATED WEIGHT		BUSHING COLOR	AFL NO.
INCHES	MILLIMETERS	LBS	KG		
0.420" - 0.474"	10.67 - 12.05	2.05	.930	Black	ATGN420/474
0.475" - 0.525"	12.07 - 13.34	2.05	.930	Blue	ATGN475/525
0.526" - 0.575"	13.36 - 14.61	2.05	.930	Orange	ATGN526/575
0.576" - 0.625"	14.63 - 15.88	2.04	.925	Brown	ATGN576/625
0.626" - 0.675"	15.90 - 17.15	2.04	.925	Green	ATGN626/675
0.676" - 0.725"	17.17 - 18.42	2.03	.921	White	ATGN676/725
0.726" - 0.775"	18.44 - 19.69	2.03	.921	Red	ATGN726/775
0.776" - 0.825"	19.71 - 20.96	2.02	.916	Purple	ATGN776/825
0.826" - 0.875"	20.98 - 22.23	2.02	.916	Yellow	ATGN826/875
0.876" - 0.925"	22.25 - 23.50	2.02	.916	Pink	ATGN876/925

Application Notes:

1. For use with ADSS cables with polyethylene jackets only. Not for use on track resistant ADSS cable.
2. As a stringing block:
Maximum line angle = 15° (7.5° per side)
Maximum number of structures = 30
3. For final installation:
Maximum line angle = 22° (11° per side)

continued
→


Trunnion Assemblies (cont.)

Ordering Information—Double Tangent Support

BUSHING NUMBER		CABLE O.D. RANGE		BUSHING COLOR CODE	MAXIMUM SPAN CAPABILITIES USING NESC LOADS IN FEET/INCHES	ESTIMATED WEIGHT	
"A"	"B"	INCHES	MM			HEAVY	LBS
420	420	.420-.474	10.67-12.04	Black	600/182.9	2.05	.930
475	475	.475-.525	12.07-13.34	Blue	600/182.9	2.05	.930
526	526	.526-.575	13.36-14.61	Orange	600/182.9	2.05	.930
576	576	.576-.625	14.63-15.88	Brown	600/182.9	2.04	.925
626	626	.626-.675	15.90-17.15	Green	600/182.9	2.04	.925
676	676	.676-.725	17.17-18.42	White	600/182.9	2.03	.921
726	726	.726-.775	18.44-19.69	Red	600/182.9	2.03	.921
776	776	.776-.825	19.71-20.96	Purple	600/182.9	2.02	.916
826	826	.826-.875	20.98-22.23	Yellow	600/182.9	2.02	.916
876	876	.876-.925	22.25-23.50	Pink	500/152.4	2.02	.916
926	926	.926-.959	23.52-24.36	Blue + White	CONTACT AFL	2.02	.916
960	960	.960-1.045	24.38-26.54	Gray	CONTACT AFL	2.02	.916

How to Order

Order by assembling part number as shown:

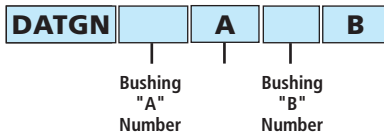

Reference table above. See Note 1 below.

Example:

- First cable 0.500" OD → Bushing "A" number = 475
- Second cable 0.750" OD → Bushing "B" number = 726
- Order by part number: DATGN475A726B

Notes:

1. Bushing "A" and "B" may be the same or different.
2. Stainless steel banding to be supplied by customer.

