


## Quick Compress Tee Connector for ACSR Conductor, Open Run, TTOC Series

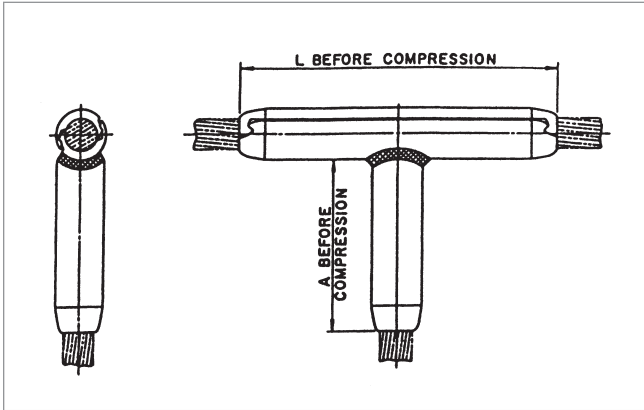

The TTOC Series Open Run Tee Connector is a permanent drop specifically designed for ACSR, AAC, AAAC and ACAR conductors.

The end tapers of all compression accessories are supplied with a high voltage finish for die size sections 12CD and above.

### Ordering Instructions

#### Step 1: Assembly Catalog Number

Determine the assembly catalog number based on the conductor being used.

#### Example:

A tee connector for 795 Drake, the complete catalog number is:  
**TTOC12**

#### Notes:

1. Tee Connectors are not prefilled with AFC.
2. Installation Instructions for Tee Connectors are on page 274.
3. For more information on die selection and ordering instructions, see Tools and Equipment tab in this catalog.

CATALOG NUMBER	CONDUCTOR				DIE SIZE	TOTAL WEIGHT		DIMENSIONS			
	CODE WORD	SIZE	STRANDING	DIAMETER		LBS	KG	A		L	
		KCMIL	AL/ST	IN				IN	MM	IN	MM
TTOC07	Owl	266.8	6/7	0.633	07CD	0.5	0.22	3.9	100	6.4	163
TTOC07	Waxwing	266.8	18/1	0.609	07CD	0.5	0.22	3.9	100	6.4	163
TTOC07	Partridge	266.8	26/7	0.642	07CD	0.5	0.22	3.9	100	6.4	163
TTOC08	Ostrich	300.0	26/7	0.680	08CD	0.7	0.32	4.4	111	7.2	183
TTOC08	Merlin	336.4	18/1	0.684	08CD	0.7	0.32	4.4	111	7.2	183
TTOC08	Linnet	336.4	26/7	0.720	08CD	0.7	0.32	4.4	111	7.2	183
TTOC09	Oriole	336.4	30/7	0.741	09CD	1.0	0.45	4.8	122	7.9	199
TTOC08	Chickadee	397.5	18/1	0.743	08CD	0.7	0.32	4.4	111	7.2	183
TTOC09	Brant	397.5	24/7	0.772	09CD	1.0	0.45	4.8	122	7.9	199
TTOC09	Ibis	397.5	26/7	0.783	09CD	1.0	0.45	4.8	122	7.9	199
TTOC10	Lark	397.5	30/7	0.806	10CD	1.3	0.59	5.3	133	8.5	216
TTOC09	Pelican	477.0	18/1	0.814	09CD	1.0	0.45	4.8	122	7.9	199
TTOC09	Flicker	477.0	24/7	0.846	09CD	1.0	0.45	4.8	122	7.9	199
TTOC10	Hawk	477.0	26/7	0.858	10CD	1.3	0.59	5.3	133	8.5	216
TTOC11	Hen	477.0	30/7	0.883	11CD	1.7	0.77	5.7	145	9.2	234
TTOC10	Osprey	556.5	18/1	0.879	10CD	1.3	0.59	5.3	133	8.5	216
TTOC10	Parakeet	556.5	24/7	0.914	10CD	1.3	0.59	5.3	133	8.5	216
TTOC10	Dove	556.5	26/7	0.927	10CD	1.3	0.59	5.3	133	8.5	216
TTOC11	Eagle	556.5	30/7	0.953	11CD	1.7	0.77	5.7	145	9.2	234
TTOC11	Peacock	605.0	24/7	0.953	11CD	1.7	0.77	5.7	145	9.2	234
TTOC11	Squab	605.0	26/7	0.966	11CD	1.7	0.77	5.7	145	9.2	234
TTOC12	Teal	605.0	30/19	0.994	12CD	2.1	0.95	6.1	155	9.9	250

## Quick Compress Tee Connector for ACSR Conductor, Open Run, TTOC Series (cont.)

CATALOG NUMBER	CONDUCTOR				DIE SIZE	TOTAL WEIGHT		DIMENSIONS			
	CODE WORD	SIZE	STRANDING	DIAMETER		LBS	KG	A		L	
		KCMIL	AL/ST	IN				IN	MM	IN	MM
TTOC10	Kingbird	636.0	18/1	0.940	10CD	1.3	0.59	5.3	133	8.5	216
TTOC11	Root	636.0	24/7	0.977	11CD	1.7	0.77	5.7	145	9.2	234
TTOC11	Grosbeak	636.0	26/7	0.990	11CD	1.7	0.77	5.7	145	9.2	234
TTOC12	Egret	636.0	30/19	1.019	12CD	2.1	0.95	6.1	155	9.9	250
TTOC10	Swift	636.0	36/1	0.930	10CD	1.3	0.59	5.3	133	8.5	216
TTOC11	Flamingo	666.6	24/7	1.000	11CD	1.7	0.77	5.7	145	9.2	234
TTOC11	Stilt	715.5	24/7	1.036	11CD	1.7	0.77	5.7	145	9.2	234
TTOC12	Starling	715.5	26/7	1.051	12CD	2.1	0.95	6.1	155	9.9	250
TTOC13	Redwing	715.5	30/19	1.081	13CD	2.9	1.32	6.6	167	10.6	269
TTOC12	Cuckoo	795.0	24/7	1.092	12CD	2.1	0.95	6.1	155	9.9	250
TTOC12	Drake	795.0	26/7	1.108	12CD	2.1	0.95	6.1	155	9.9	250
TTOC14	Mallard	795.0	30/19	1.140	14CD	3.5	1.59	7.0	178	11.2	285
TTOC11	Coot	795.0	36/1	1.040	11CD	1.7	0.77	5.7	145	9.2	234
TTOC12	Tern	795.0	45/7	1.063	12CD	2.1	0.95	6.1	155	9.9	250
TTOC12	Condor	795.0	54/7	1.093	12CD	2.1	0.95	6.1	155	9.9	250
TTOC12	Ruddy	900.0	45/7	1.131	12CD	2.1	0.95	6.1	155	9.9	250
TTOC13	Canary	900.0	54/7	1.162	13CD	2.9	1.32	6.6	167	10.6	269
TTOC12	Catbird	954.0	36/1	1.140	12CD	2.1	0.95	6.1	155	9.9	250
TTOC13	Rail	954.0	45/7	1.165	13CD	2.9	1.32	6.6	167	10.6	269
TTOC13	Cardinal	954.0	54/7	1.196	13CD	2.9	1.32	6.6	167	10.6	269
TTOC13	Tanger	1033.5	36/1	1.186	13CD	2.9	1.32	6.6	167	10.6	269
TTOC13	Ortolan	1033.5	45/7	1.212	13CD	2.9	1.32	6.6	167	10.6	269
TTOC14	Curlew	1033.5	54/7	1.244	14CD	3.5	1.59	7.0	178	11.2	285
TTOC14	Bluejay	1113.0	45/7	1.259	14CD	3.5	1.59	7.0	178	11.2	285
TTOC14	Finch	1113.0	54/19	1.293	14CD	3.5	1.59	7.0	178	11.2	285
TTOC14	Bunting	1192.5	45/7	1.302	14CD	3.5	1.59	7.0	178	11.2	285
TTOC15	Grackle	1192.5	54/19	1.333	15CD	4.2	1.91	7.4	189	11.9	302
TTOC15	Bittern	1272.0	45/7	1.345	15CD	4.2	1.91	7.4	189	11.9	302
TTOC15	Pheasant	1272.0	54/19	1.382	15CD	4.2	1.91	7.4	189	11.9	302
TTOC15	Dipper	1351.5	45/7	1.385	15CD	4.2	1.91	7.4	189	11.9	302
TTOC15	Martin	1351.5	54/19	1.424	15CD	4.2	1.91	7.4	189	11.9	302
TTOC16	Bobolink	1431.0	45/7	1.427	16CD	5.0	2.27	7.8	198	12.5	316
TTOC16	Plover	1431.0	54/19	1.465	16CD	5.0	2.27	7.8	198	12.5	316
TTOC16	Nuthatch	1510.5	45/7	1.466	16CD	5.0	2.27	7.8	198	12.5	316
TTOC16	Parrot	1510.5	54/19	1.506	16CD	5.0	2.27	7.8	198	12.5	316
TTOC16	Lapwing	1590.0	45/7	1.504	16CD	5.0	2.27	7.8	198	12.5	316
TTOC17	Falcon	1590.0	54/19	1.545	17CD	5.9	2.68	8.3	210	13.1	333
TTOC17	Chukar	1780.0	84/19	1.602	17CD	5.9	2.68	8.3	210	13.1	333
TTOC18	—	2034.0	72/7	1.681	18CD	7.0	3.16	8.6	219	13.7	348
TTOC19	Bluebird	2156.0	84/19	1.762	19CD	8.0	3.63	9.1	230	14.4	364
TTOC19	Kiwi	2167.0	72/7	1.737	19CD	8.0	3.63	9.1	230	14.4	364
TTOC19	Thrasher	2312.0	76/19	1.802	19CD	8.0	3.63	9.1	230	14.4	364
TTOC20	Joree	2515.0	76/19	1.880	20CD	9.2	4.17	9.4	240	14.9	378