


Terminal Connectors—5600 Series for AAC Conductors, Straight

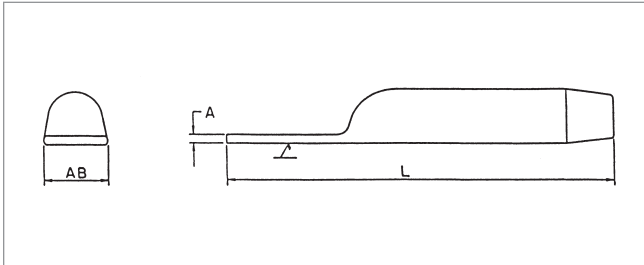

The 5600 Series Straight Terminal Connector is designed for AAC conductors. The terminal connector is fabricated from AFL seamless drawn aluminum.

When used with the dead end, the straight terminal connector allows drop at a 15° angle. All terminal connectors are designed for limited tension use, maintaining a minimum of 40% of the ASTM rated strength of the conductor on which it is being used.

Ordering Instructions

Step 1: Assembly Catalog Number

Determine the assembly catalog number based on the conductor being used.

Step 2: Extra High Voltage Finish

For Extra High Voltage Finish, use 'EHV'.
For Standard Finish, leave blank.

Step 3: Assemble Catalog Number.



Example:

For 795 Arbutus conductor with an EHV finish, the complete catalog number is:

5630.109EHV

TERMINAL CATALOG NUMBER	CODE WORD	CONDUCTOR			DIE SIZE ALUMINUM HEX DIE	TOTAL WEIGHT		DIMENSION						PAD SIZE
		SIZE	STRANDING	DIA.		LBS	KG	L		A		AB		
		KCMIL	AL	IN	IN			MM	IN	MM	IN	MM		
5673.391	Poppy	1/0	7	0.368	73AH	0.1	0.06	7.6	194	0.2	5	1.0	25	B
5674.438	Aster	2/0	7	0.414	74AH	0.3	0.14	8.3	211	0.3	9	1.0	25	B
5674.484	Phlox	3/0	7	0.464	74AH	0.3	0.12	8.3	211	0.3	8	1.0	25	B
5675.547	Oxlip	4/0	7	0.522	75AH	0.5	0.23	9.5	241	0.5	13	1.0	25	B
5675.609	Valerian	250.0	19	0.575	75AH	0.5	0.20	9.8	248	0.5	12	1.0	25	B
5675.609	Laurel	266.8	19	0.593	75AH	0.5	0.20	9.8	248	0.5	12	1.0	25	B
5676.656	Peony	300.0	19	0.629	76AH	0.8	0.38	10.4	265	0.6	15	1.3	32	B
5676.688	Tulip	336.4	19	0.666	76AH	0.8	0.37	10.6	268	0.6	14	1.3	32	B
5620.719	Daffodil	350.0	19	0.679	20AH	0.9	0.41	10.8	275	0.5	12	1.3	32	B
5676.750	Canna	397.5	19	0.724	76AH	0.7	0.34	10.8	275	0.5	13	1.3	32	B
5620.812	Goldentuft	450.0	19	0.770	20AH	0.8	0.37	12.3	306	0.5	12	1.3	32	B
5620.812	Yarrow	450.0	37	0.772	20AH	0.8	0.37	12.3	306	0.5	12	1.3	32	B
5620.812	Cosmos	477.0	19	0.793	20AH	0.8	0.37	12.3	306	0.5	12	1.3	32	B
5620.812	Syringa	477.0	37	0.795	20AH	0.8	0.37	12.3	306	0.5	12	1.3	32	B
5624.875	Cosmos	477.0	19	0.793	24AH	1.4	0.64	12.6	319	0.6	16	1.5	38	B
5624.875	Syringa	477.0	37	0.795	24AH	1.4	0.64	12.6	319	0.6	16	1.5	38	B
5624.875	Zinnia	500.0	19	0.811	24AH	1.4	0.64	12.6	319	0.6	16	1.5	38	B

Notes:


1. Pad Dimensions are on page 117.
2. AFL Filler Compound (AFC) Requirements are on page 117.
3. Installation Instructions for Terminals are on page 131.
4. Bolts, nuts and washers are not supplied with the straight terminal connector.

Terminal Connectors—5600 Series for AAC Conductors, Straight (cont.)

TERMINAL CATALOG NUMBER	CODE WORD	CONDUCTOR			DIE SIZE	TOTAL WEIGHT		DIMENSION						PAD SIZE
		SIZE	STRANDING	DIA.	ALUMINUM	LBS	KG	L		A		AB		
		KCMIL	AL	IN	HEX DIE			IN	MM	IN	MM	IN	MM	
5624.875	Hyacinth	500.0	37	0.813	24AH	1.4	0.64	12.6	319	0.6	16	1.5	38	B
5624.938	Dahlia	556.5	19	0.856	24AH	1.3	0.59	12.8	324	0.6	15	1.5	38	B
5624.938	Mistletoe	556.5	387	0.858	24AH	1.3	0.59	12.8	324	0.6	15	1.5	38	B
5624.938	Meadowsweet	600.0	37	0.891	24AH	1.3	0.59	12.8	324	0.6	15	1.5	38	B
5624.969	Orchid	636.0	37	0.918	24AH	1.3	0.59	12.8	325	0.6	15	1.5	38	B
5624.969	Heuchera	650.0	37	0.928	24AH	1.3	0.59	12.8	325	0.6	15	1.5	38	B
5627.100	Flag	700.0	61	0.964	27AH	1.7	0.77	12.1	333	0.4	10	3.0	76	D
5627.106	Violet	715.5	37	0.974	27AH	1.7	0.77	12.1	333	0.4	10	3.0	76	D
5627.106	Nasturtium	715.5	61	0.975	27AH	1.7	0.77	12.1	333	0.4	10	3.0	76	D
5627.106	Petunia	750.0	37	0.997	27AH	1.7	0.77	12.1	333	0.4	10	3.0	76	D
5627.106	Cattail	750.0	61	0.998	27AH	1.7	0.77	12.1	333	0.4	10	3.0	76	D
5630.109	Arbutus	795.0	37	1.026	30AH	2.4	1.09	14.3	363	0.5	13	3.0	76	D
5630.109	Lilac	795.0	61	1.028	30AH	2.4	1.09	14.3	363	0.5	13	3.0	76	D
5630.109	—	800.0	37	1.031	30AH	2.4	1.09	14.3	363	0.5	13	3.0	76	D
5630.109	Heliotrope	800.0	61	1.031	30AH	2.4	1.09	14.3	363	0.5	13	3.0	76	D
5630.116	Snapdragon	900.0	61	1.094	30AH	2.3	1.04	14.6	370	0.5	12	3.0	76	D
5630.122	Magnolia	954.0	37	1.124	30AH	2.2	1.00	14.8	375	0.4	10	3.0	76	D
5630.122	Goldenrod	954.0	61	1.126	30AH	2.2	1.00	14.8	375	0.4	10	3.0	76	D
5630.122	Camellia	1000.0	61	1.152	30AH	2.2	1.00	14.8	375	0.4	10	3.0	76	D
5630.122	Bluebell	1033.5	37	1.170	30AH	2.2	1.00	14.8	375	0.4	10	3.0	76	D
5630.122	Larkspur	1033.5	61	1.172	30AH	2.2	1.00	14.8	375	0.4	10	3.0	76	D
5634.128	Marigold	1113.0	61	1.216	34AH	3.3	1.50	15.3	389	0.6	16	3.0	76	D
5634.134	Hawthorn	1192.5	61	1.258	34AH	3.2	1.45	15.8	4	0.6	15	3.0	76	D
5634.134	Narcissus	1272.0	61	1.300	34AH	3.2	1.45	15.8	4	0.6	15	3.0	76	D
5636.144	Columbine	1351.0	61	1.340	36AH	3.6	1.63	16.6	421	0.6	15	3.0	76	D
5636.144	Carnation	1431.0	61	1.379	36AH	3.6	1.63	16.6	421	0.6	15	3.0	76	D
5636.147	—	1500.0	91	1.412	36AH	3.5	1.59	16.1	409	0.6	16	3.0	76	D
5636.147	Gladiolus	1510.5	61	1.187	36AH	3.5	1.59	16.1	409	0.6	16	3.0	76	D
5638.156	Coreopsis	1590.0	61	1.250	38AH	4.2	1.91	17.9	454	0.7	17	3.0	76	D
5638.156	Dogwood	1590.0	91	1.454	38AH	4.2	1.91	17.9	454	0.7	17	3.0	76	D
5640.162	Jessamine	1750.0	61	1.525	40AH	4.8	2.18	17.6	446	0.7	17	3.0	76	D
5642.178	Cowslip	2000.0	91	1.630	42AH	5.3	2.40	19.0	483	0.7	17	4.0	102	E
5644.181	Sagebrush	2250.0	91	1.729	44AH	6.3	2.86	19.5	493	0.7	18	4.0	102	E
5644.181	—	2300.0	61	1.750	44AH	6.3	2.86	19.5	493	0.7	18	4.0	102	E
5644.181	—	2300.0	91	1.750	44AH	6.3	2.86	19.5	493	0.7	18	4.0	102	E
5644.188	Lupine	2500.0	91	1.823	44AH	6.1	2.77	19.6	498	0.7	18	4.0	102	E
5648.197	Bitterroot	2750.0	91	1.912	48AH	8.2	3.72	21.6	549	0.8	21	4.0	102	E

AAC ACCESSORIES

Terminal Connectors—5100 Series for AAC Conductors, 15°

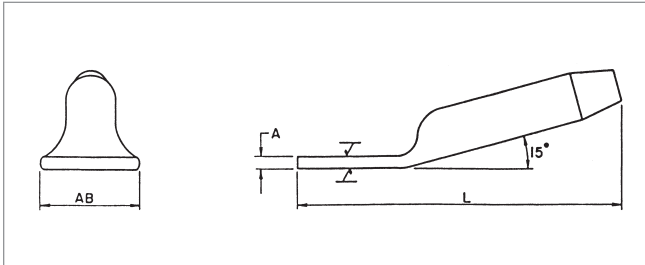

The 5100 Series 15° Terminal Connector is designed for AAC conductors. The terminal connector is fabricated from AFL seamless drawn aluminum.

When used with the dead end, the 15° terminal connector can be bolted in either the straight or 30° position. All terminal connectors are designed for limited tension use, maintaining a minimum of 40% of the ASTM rated strength of the conductor on which it is being used. Aluminum hardware is supplied with the 15° terminal connector.

Ordering Instructions

Step 1: Assembly Catalog Number

Determine the assembly catalog number based on the conductor being used.

Step 2: Extra High Voltage Finish

For Extra High Voltage Finish, use 'EHV'.
For Standard Finish, leave blank.

Step 3: Assemble Catalog Number.



Example:

For 795 Arbutus conductor with an EHV finish, the complete catalog number is:

5130.109EHV

TERMINAL CATALOG NUMBER	CODE WORD	CONDUCTOR			DIE SIZE ALUMINUM HEX DIE	TOTAL WEIGHT		DIMENSION						PAD SIZE
		SIZE	STRANDING	DIA.		LBS	KG	L		A		AB		
		KCMIL	AL	IN	IN			MM	IN	MM	IN	MM		
5173.391	Poppy	1/0	7	0.368	73AH	0.3	0.12	7.6	194	0.2	5	1.0	25	B
5174.438	Aster	2/0	7	0.414	74AH	0.4	0.20	8.3	211	0.3	9	1.0	25	B
5174.438		2/0	19	0.419	74AH	0.4	0.20	8.3	211	0.3	9	1.0	25	B
5174.484	Phlox	3/0	7	0.464	74AH	0.4	0.19	8.3	211	0.3	8	1.0	25	B
5174.484		3/0	19	0.470	74AH	0.4	0.19	8.3	211	0.3	8	1.0	25	B
5175.547	Oxlip	4/0	7	0.522	75AH	0.7	0.29	9.5	241	0.5	13	1.0	25	B
		4/0	19	0.528	75AH	0.7	0.29	9.5	241	0.5	13	1.0	25	B
5175.609	Valerian	250.0	19	0.575	75AH	0.6	0.27	9.8	248	0.5	12	1.0	25	B
5175.609	Daisy	266.8	7	0.586	75AH	0.6	0.27	9.8	248	0.5	12	1.0	25	B
5175.609	Laurel	266.8	19	0.593	75AH	0.6	0.27	9.8	248	0.5	12	1.0	25	B
5176.656	Peony	300.0	19	0.629	76AH	0.9	0.41	10.4	265	0.6	15	1.3	32	B
5176.688	Tulip	336.4	19	0.666	76AH	0.9	0.40	10.6	268	0.6	14	1.3	32	B

Notes:

1. Pad Dimensions are on page 117.
2. AFL Filler Compound (AFC) Requirements are on page 115.
3. Installation Instructions for Terminals are on page 131.
4. Supplied with aluminum hardware.

Terminal Connectors—5100 Series for AAC Conductors, 15° (cont.)

TERMINAL CATALOG NUMBER	CODE WORD	CONDUCTOR			DIE SIZE		TOTAL WEIGHT		DIMENSION						PAD SIZE
		SIZE	STRANDING	DIA.	ALUMINUM	HEX DIE			L		A		AB		
		KCMIL	AL	IN			IN	MM	IN	MM	IN	MM			
5120.719	Daffodil	350.0	19	0.679	76AH	0.9	0.39	10.7	272	0.5	13	1.3	32	B	
5176.750	Canna	397.5	19	0.724	76AH	0.8	0.38	10.8	275	0.5	13	1.3	32	B	
5120.812	Goldentuft	450.0	19	0.770	20AH	1.0	0.44	12.1	306	0.5	12	1.3	32	B	
5120.812	Yarrow	450.0	37	0.772	20AH	1.0	0.44	12.1	306	0.5	12	1.3	32	B	
5120.812	Cosmos	477.0	19	0.793	20AH	1.0	0.44	12.1	306	0.5	12	1.3	32	B	
5120.812	Syringa	477.0	37	0.795	20AH	1.0	0.44	12.1	306	0.5	12	1.3	32	B	
5124.875	Cosmos	477.0	19	0.793	24AH	1.6	0.73	12.6	319	0.6	16	1.5	38	B	
5124.875	Syringa	477.0	37	0.795	24AH	1.6	0.73	12.6	319	0.6	16	1.5	38	B	
5124.875	Zinnia	500.0	19	0.811	24AH	1.6	0.73	12.6	319	0.6	16	1.5	38	B	
5124.875	Hyacinth	500.0	37	0.813	24AH	1.6	0.73	12.6	319	0.6	16	1.5	38	B	
5124.938	Dahlia	556.5	19	0.856	24AH	1.5	0.68	12.8	324	0.6	15	1.5	38	B	
5124.938	Mistletoe	556.5	37	0.858	24AH	1.5	0.68	12.8	324	0.6	15	1.5	38	B	
5124.938	Meadowsweet	600.0	37	0.891	24AH	1.5	0.68	12.8	324	0.6	15	1.5	38	B	
5124.969	Orchid	636.0	37	0.918	24AH	1.5	0.68	12.8	325	0.6	15	1.5	38	B	
5124.969	Heuchera	650.0	37	0.928	24AH	1.5	0.68	12.8	325	0.6	15	1.5	38	B	
5127.100	Flag	700.0	61	0.964	27AH	1.9	0.86	12.3	313	0.4	10	3.0	76	D	
5127.106	Violet	715.5	37	0.974	27AH	1.9	0.86	12.3	313	0.4	10	3.0	76	D	
5127.106	Nasturtium	715.5	61	0.975	27AH	1.9	0.86	12.3	313	0.4	10	3.0	76	D	
5127.106	Petunia	750.0	37	0.997	27AH	1.9	0.86	12.3	313	0.4	10	3.0	76	D	
5127.106	Cattail	750.0	61	0.998	27AH	1.9	0.86	12.3	313	0.4	10	3.0	76	D	
5130.109	Arbutus	795.0	37	1.026	30AH	2.7	1.22	13.6	346	0.5	13	3.0	76	D	
5130.109	Lilac	795.0	61	1.028	30AH	2.7	1.22	13.6	346	0.5	13	3.0	76	D	
5130.109	—	800.0	37	1.031	30AH	2.7	1.22	13.6	346	0.5	13	3.0	76	D	
5130.109	Heliotrope	800.0	61	1.031	30AH	2.7	1.22	13.6	346	0.5	13	3.0	76	D	
5130.116	Snapdragon	900.0	61	1.094	30AH	2.6	1.18	13.9	354	0.5	12	3.0	76	D	
5130.122	Magnolia	954.0	37	1.124	30AH	2.5	1.13	14.3	362	0.4	10	3.0	46	D	
5130.122	Goldenrod	954.0	61	1.126	30AH	2.5	1.13	14.3	362	0.4	10	3.0	46	D	
5130.122	Camellia	1000.0	61	1.152	30AH	2.5	1.13	14.3	362	0.4	10	3.0	46	D	
5130.122	Bluebell	1033.5	37	1.170	30AH	2.5	1.13	14.3	362	0.4	10	3.0	46	D	
5130.122	Larkspur	1033.5	61	1.172	30AH	2.5	1.13	14.3	362	0.4	10	3.0	46	D	
5134.128	Marigold	1113.0	61	1.216	34AH	3.6	1.63	14.3	363	0.6	16	3.0	76	D	
5134.134	Hawthorn	1192.5	61	1.258	34AH	3.5	1.59	14.5	368	0.6	15	3.0	76	D	
5134.134	Narcissus	1272.0	61	1.300	34AH	3.5	1.59	14.5	368	0.6	15	3.0	76	D	
5136.144	Columbine	1351.0	61	1.340	36AH	3.8	1.72	15.3	389	0.6	15	3.0	76	D	


AAC ACCESSORIES

Terminal Connectors—5100 Series for AAC Conductors, 15° (cont.)

TERMINAL CATALOG NUMBER	CONDUCTOR CODE WORD	CONDUCTOR			DIE SIZE		TOTAL WEIGHT		DIMENSION						PAD SIZE
		SIZE	STRANDING	DIA.	ALUMINUM	HEX DIE			L		A		AB		
		KCMIL	AL	IN			IN	MM	IN	MM	IN	MM			
5136.144	Carnation	1431.0	61	1.379	36AH	3.8	1.72	15.3	389	0.6	15	3.0	76	D	
5136.147	—	1500.0	91	1.412	36AH	3.8	1.72	15.1	384	0.6	16	3.0	76	D	
5136.147	Gladiolus	1510.5	61	1.187	36AH	3.8	1.72	15.1	384	0.6	16	3.0	76	D	
5138.156	Coreopsis	1590.0	61	1.250	38AH	4.4	2.00	16.9	424	0.9	17	3.0	76	D	
5138.156	Dogwood	1590.0	91	1.454	38AH	4.4	2.00	16.9	424	0.9	17	3.0	76	D	
5140.162	Jessamine	1750.0	61	1.525	40AH	5.3	2.40	17.4	443	0.9	18	4.0	102	E	
5142.178	Cowslip	2000.0	91	1.630	42AH	5.7	2.59	18.5	470	0.7	17	4.0	102	E	
5144.181	Sagebrush	2250.0	91	1.729	44AH	6.8	3.08	18.5	470	0.7	18	4.0	102	E	
5144.181	—	2300.0	61	1.750	44AH	6.8	3.08	18.5	470	0.7	18	4.0	102	E	
5144.181	—	2300.0	91	1.750	44AH	6.8	3.08	18.5	470	0.7	18	4.0	102	E	
5144.188	Lupine	2500.0	91	1.823	44AH	6.6	2.99	18.6	473	0.7	18	4.0	102	E	
5148.197	Bitterroot	2750.0	91	1.912	48AH	8.7	3.95	20.3	514	0.8	21	4.0	102	E	

AAC ACCESSORIES

Terminal Connectors—5800 Series for AAC Conductors, 90°

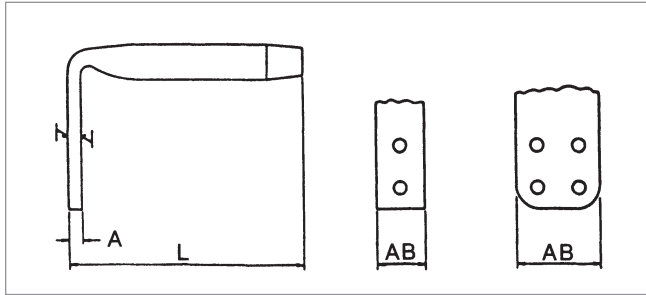

Ordering Instructions

Step 1: Assembly Catalog Number

Determine the assembly catalog number based on the conductor being used.

Step 2: Extra High Voltage Finish

For Extra High Voltage Finish, use 'EHV'.
For Standard Finish, leave blank.

Step 3: Assemble Catalog Number.



The 5800 Series 90° Terminal Connector is designed for AAC conductors. The terminal connector is fabricated from AFL seamless drawn aluminum.

All terminal connectors are designed for limited tension use, maintaining a minimum of 40% of the ASTM rated strength of the conductor on which it is being used.

Example:

For 795 Arbutus conductor with an EHV finish, the complete catalog number is:

5830.109EHV

TERMINAL CATALOG NUMBER	CONDUCTOR				DIE SIZE	TOTAL WEIGHT		DIMENSION						PAD SIZE
	CODE WORD	SIZE	STRANDING	DIA.				ALUMINUM HEX DIE	L		A		AB	
		KCMIL	AL	IN	LBS	KG	IN		MM	IN	MM	IN	MM	
5873.391	Poppy	1/0	7	0.368	73AH	0.2	0.07	3.9	99	0.2	5	1.0	25	B
5874.438	Aster	2/0	7	0.414	74AH	0.3	0.15	4.9	124	0.3	9	1.0	25	B
5874.484	Phlox	3/0	7	0.464	74AH	0.3	0.13	4.9	124	0.3	8	1.0	25	B
5875.547	Oxlip	4/0	7	0.522	75AH	0.5	0.24	6.0	152	0.5	13	1.0	25	B
5875.609	Valerian	250.0	19	0.575	75AH	0.5	0.22	6.3	159	0.5	12	1.0	25	B
5875.609	Laurel	266.8	19	0.593	75AH	0.5	0.22	6.3	159	0.5	12	1.0	25	B
5876.656	Peony	300.0	19	0.629	76AH	0.8	0.38	7.1	181	0.6	15	1.3	32	B
5876.688	Tulip	336.4	19	0.666	76AH	0.8	0.37	7.3	184	0.6	14	1.3	32	B
5820.719	Daffodil	350.0	19	0.679	76AH	0.8	0.36	7.3	184	0.5	13	1.3	32	B
5876.750	Canna	397.5	19	0.724	76AH	0.7	0.34	7.4	187	0.5	13	1.3	32	B
5820.812	Goldentuft	450.0	19	0.770	20AH	0.9	0.39	8.9	226	0.5	12	1.3	32	B
5820.812	Yarrow	450.0	37	0.772	20AH	0.9	0.39	8.9	226	0.5	12	1.3	32	B
5820.812	Cosmos	477.0	19	0.793	20AH	0.9	0.39	8.9	226	0.5	12	1.3	32	B
5820.812	Syringa	477.0	37	0.795	20AH	0.9	0.39	8.9	226	0.5	12	1.3	32	B
5824.875	Cosmos	477.0	19	0.793	24AH	1.5	0.68	9.4	238	0.6	16	1.5	38	B
5824.875	Syringa	477.0	37	0.795	24AH	1.5	0.68	9.4	238	0.6	16	1.5	38	B

Notes:

1. Pad Dimensions are on page 117.
2. AFL Filler Compound (AFC) Requirements are on page 115.
3. Installation Instructions for Terminals are on page 131.
4. Bolts, nuts and washers are not supplied with the 90° terminal connector.

Terminal Connectors—5800 Series for AAC Conductors, 90° (cont.)

TERMINAL CATALOG NUMBER	CONDUCTOR				DIE SIZE		TOTAL WEIGHT		DIMENSION						PAD SIZE
	CODE WORD	SIZE	STRANDING	DIA.	ALUMINUM HEX DIE	LBS	KG	L		A		AB			
		KCMIL	AL	IN				IN	MM	IN	MM	IN	MM		
5824.875	Zinnia	500.0	19	0.811	24AH	1.5	0.68	9.4	238	0.6	16	1.5	38	B	
5824.875	Hyacinth	500.0	37	0.813	24AH	1.5	0.68	9.4	238	0.6	16	1.5	38	B	
5824.938	Dahlia	556.5	19	0.856	24AH	1.4	0.64	9.5	241	0.6	15	1.5	38	B	
5824.938	Mistletoe	556.5	37	0.858	24AH	1.4	0.64	9.5	241	0.6	15	1.5	38	B	
5824.938	Meadowsweet	600.0	37	0.891	24AH	1.4	0.64	9.5	241	0.6	15	1.5	38	B	
5824.969	Orchid	636.0	37	0.918	24AH	1.4	0.64	9.5	241	0.6	15	1.5	38	B	
5824.969	Heuchera	650.0	37	0.928	24AH	1.4	0.64	9.5	241	0.6	15	1.5	38	B	
5827.100	Flag	700.0	61	0.964	27AH	1.7	0.77	8.9	226	0.4	10	3.0	76	D	
5827.106	Violet	715.5	37	0.974	27AH	1.7	0.77	8.9	226	0.4	10	3.0	76	D	
5827.106	Nasturtium	715.5	61	0.975	27AH	1.7	0.77	8.9	226	0.4	10	3.0	76	D	
5827.106	Petunia	750.0	37	0.997	27AH	1.7	0.77	8.9	226	0.4	10	3.0	76	D	
5827.106	Cattail	750.0	61	0.998	27AH	1.7	0.77	8.9	226	0.4	10	3.0	76	D	
5830.109	Arbutus	795.0	37	1.026	30AH	2.4	1.09	10.3	260	0.5	13	3.0	76	D	
5830.109	Lilac	795.0	61	1.028	30AH	2.4	1.09	10.3	260	0.5	13	3.0	76	D	
5830.109	—	800.0	37	1.031	30AH	2.4	1.09	10.3	260	0.5	13	3.0	76	D	
5830.109	Heliotrope	800.0	61	1.031	30AH	2.4	1.09	10.3	260	0.5	13	3.0	76	D	
5830.116	Snapdragon	900.0	61	1.094	30AH	2.3	1.04	10.5	267	0.5	12	3.0	76	D	
5830.122	Magnolia	954.0	37	1.124	30AH	2.2	1.00	10.8	273	0.4	10	3.0	76	D	
5830.122	Goldenrod	954.0	61	1.126	30AH	2.2	1.00	10.8	273	0.4	10	3.0	76	D	
5830.122	Camellia	1000.0	61	1.152	30AH	2.2	1.00	10.8	273	0.4	10	3.0	76	D	
5830.122	Bluebell	1033.5	37	1.170	30AH	2.2	1.00	10.8	273	0.4	10	3.0	76	D	
5830.122	Larkspur	1033.5	61	1.172	30AH	2.2	1.00	10.8	273	0.4	10	3.0	76	D	
5834.128	Marigold	1113.0	61	1.216	34AH	3.3	1.50	11.5	292	0.6	16	3.0	76	D	
5834.134	Hawthorn	1192.5	61	1.258	34AH	3.2	1.45	11.5	292	0.6	15	3.0	76	D	
5834.134	Narcissus	1272.0	61	1.300	34AH	3.2	1.45	11.5	292	0.6	15	3.0	76	D	
5836.144	Columbine	1351.0	61	1.340	36AH	3.5	1.59	12.1	308	0.6	15	3.0	76	D	
5836.144	Carnation	1431.0	61	1.379	36AH	3.5	1.59	12.1	308	0.6	15	3.0	76	D	
5836.147	—	1500.0	91	1.412	36AH	3.5	1.59	12.1	308	0.6	16	3.0	76	D	
5836.147	Gladiolus	1510.5	61	1.187	36AH	3.5	1.59	12.1	308	0.6	16	3.0	76	D	
5838.156	Coreopsis	1590.0	61	1.250	38AH	4.2	1.91	13.6	346	0.7	17	3.0	76	D	
5838.156	Dogwood	1590.0	91	1.454	38AH	4.2	1.91	13.6	346	0.7	17	3.0	76	D	
5840.162	Jessamine	1750.0	61	1.525	40AH	4.7	2.13	13.3	338	0.7	17	3.0	76	D	
5842.178	Cowslip	2000.0	91	1.630	42AH	5.5	2.49	14.5	368	0.7	17	4.0	102	E	
5844.181	Sagebrush	2250.0	91	1.729	44AH	6.7	3.04	14.6	371	0.7	18	4.0	102	E	
5844.181	—	2300.0	61	1.750	44AH	6.7	3.04	14.6	371	0.7	18	4.0	102	E	
5844.181	—	2300.0	91	1.750	44AH	6.7	3.04	14.6	371	0.7	18	4.0	102	E	
5844.188	Lupine	2500.0	91	1.823	44AH	6.6	2.99	15.1	384	0.7	18	4.0	102	E	
5848.197	Bitterroot	2750.0	91	1.912	48AH	8.5	3.86	16.4	416	0.8	21	4.0	102	E	

AAC ACCESSORIES