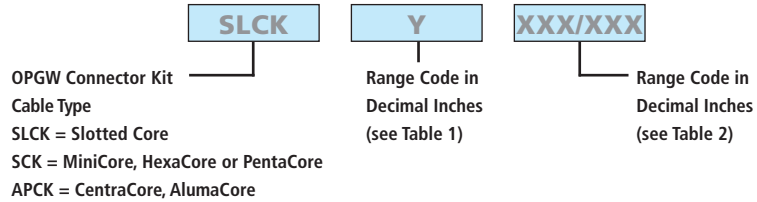


## Connector Kits for SB01 Splice Enclosures – OPGW Cable

### Connector Kit: Optical Ground Wire






Optical Ground Wire Connector Kit



**Ordering Example:** For 0.571" diameter SX-67/49/571, which has a layer 1 total diameter of 0.358", the AFL number is SCKB569/583.

**Table 1**

RANGE CODE	 SLOTTED CORE DIAMETER	 MINICORE, HEXACORE OR PENTACORE LAYER 1 DIAMETER	 CENTRACORE OR ALUMACORE PIPE DIAMETER
A	.185 - .227	.000 - .230	.185 - .227
B	.228 - .264	.231 - .500	.228 - .264
C	.265 - .300	.501 - .636	.265 - .300
D	.301 - .374	—	.301 - .374
E	.375 - .479	—	.375 - .479
F	.480 - .550	—	.480 - .550
G	.551 - .630	—	.551 - .630
H	.631 - .700	—	.631 - .700

**Table 2**

RANGE CODE	CABLE DIAMETER RANGE	
	MIN.	MAX.
225/240	.225	.240
241/255	.241	.255
256/271	.256	.271
272/286	.272	.286
287/302	.287	.302
303/318	.303	.318
319/333	.319	.333
334/349	.334	.349
350/365	.350	.365
366/380	.366	.380
381/396	.381	.396
397/412	.397	.412
413/427	.413	.427
428/443	.428	.443
444/459	.444	.459
460/474	.460	.474
475/490	.475	.490

RANGE CODE	CABLE DIAMETER RANGE	
	MIN.	MAX.
491/506	.491	.506
507/521	.507	.521
522/537	.522	.537
538/553	.538	.553
554/568	.554	.568
569/583	.569	.583
584/599	.584	.599
600/615	.600	.615
616/630	.616	.630
631/646	.631	.646
647/662	.647	.662
663/677	.663	.677
678/693	.678	.693
694/708	.694	.708
709/727	.709	.727
728/740	.728	.740