

TYPE SWGXOSS Swage Offset Split Cross



A Swage type offset split cross connector used to connect a cable run to another cable. It features two sliding channels for ease of installation.

Material

Copper Alloy


Notes

- For tin plating add "-SN" to catalog number. EX: SWGXOSS2450-SN.
- For detailed conductor range information, please see page 33 (L11557).

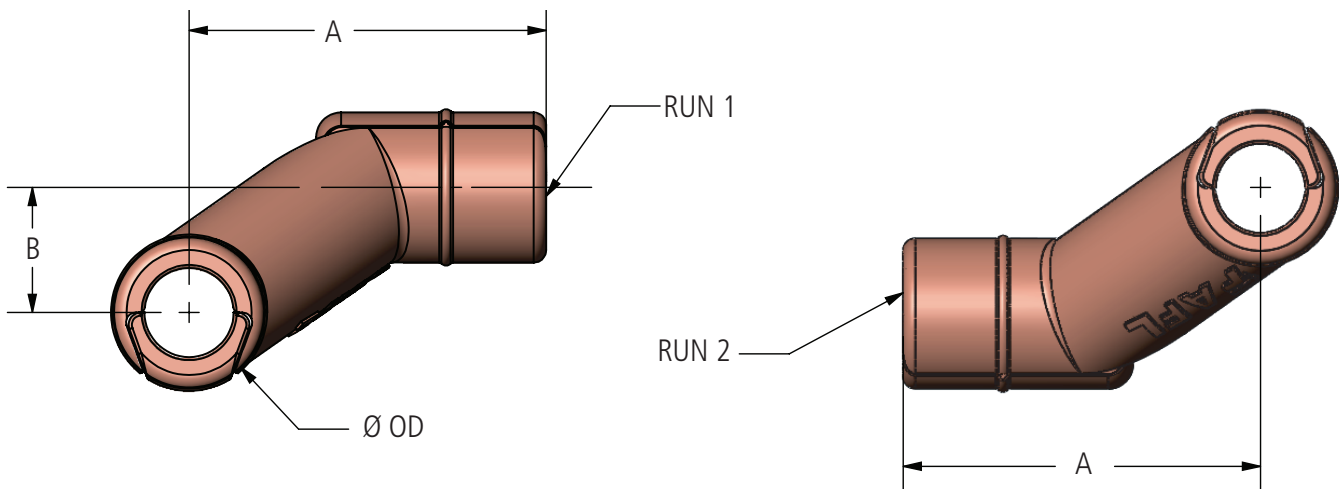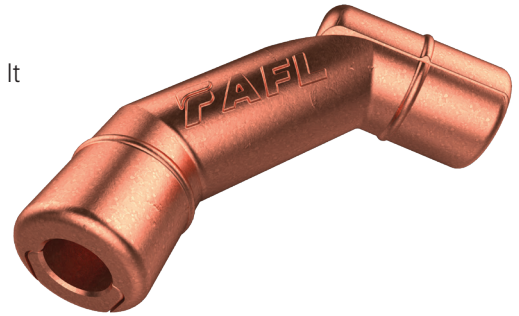

TYPE SWGXOSS Swage Offset Split Cross

Ordering Information

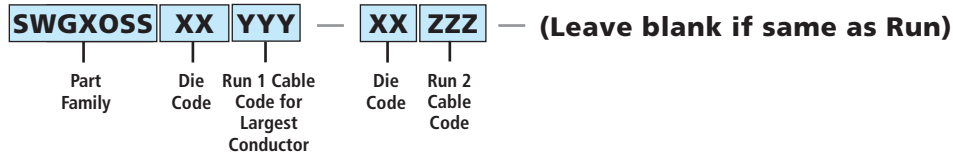

Die Code comes from maximum connector OD from Table below.

- EX: Tin plated offset split cross for 250MCM Cu to 500MCM Cu is SWGXOSS2425-2450-SN
- EX: Offset split cross for 250MCM Cu to 250MCM is SWGXOSS2025

AFL NO.	COPPER CABLE (AWG OR KCMIL)		DIMENSIONS IN INCHES			DIE SIZE
	RUN 1	RUN 2	OD	A	B	
SWGXOSS202-2021	#6	4/0	1.25	3.20	1.00	45TD20
SWGXOSS2013	1/0	2/0	1/0	3.20	1.00	45TD20
SWGXOSS2013-2075C			3/4" CU ROD	1.25	3.20	1.00
SWGXOSS2017	3/0	3/0	1.25	3.20	1.00	45TD20
SWGXOSS2017-2025		250	1.25	3.20	1.00	45TD20
SWGXOSS2017-2075C		3/4" CU ROD	1.25	3.20	1.00	45TD20
SWGXOSS2021-2013	4/0	1/0	1.25	3.20	1.00	45TD20
SWGXOSS2021-2017		3/0	1.25	3.20	1.00	45TD20
SWGXOSS2021		4/0	1.25	3.20	1.00	45TD20
SWGXOSS2021-2025		250	1.25	3.20	1.00	45TD20
SWGXOSS2025-2013	250	1/0	1.25	3.20	1.00	45TD20
SWGXOSS2025-2021		4/0	1.25	3.20	1.00	45TD20
SWGXOSS2025		250	1.25	3.20	1.00	45TD20
SWGXOSS2075C-2021	3/4" CU ROD	4/0	1.25	3.20	1.00	45TD20
SWGXOSS2421-2450	4/0	500	1.50	3.57	1.25	45TD24
SWGXOSS2425-2450	250	500	1.50	3.57	1.25	45TD24
SWGXOSS2430-2421	300	4/0	1.50	3.57	1.25	45TD24
SWGXOSS2430-2425		250	1.50	3.57	1.25	45TD24
SWGXOSS2430		300	1.50	3.57	1.25	45TD24
SWGXOSS2435-2421	350	4/0	1.50	3.57	1.25	45TD24
SWGXOSS2435-2425		250	1.50	3.57	1.25	45TD24
SWGXOSS2435		300	1.50	3.57	1.25	45TD24
SWGXOSS2450	500	500	1.50	3.57	1.25	45TD24
SWGXOSS2475C-2421	3/4" CU ROD	4/0	1.50	3.57	1.25	45TD24