

TYPE SWGXOSS Swage Offset Split Cross



A Swage type offset split cross connector used to connect a cable run to another cable. It features two sliding channels for ease of installation.

Material


Copper Alloy

Notes

- For tin plating add "-SN" to catalog number. EX: SWGXOSS2450-SN.
- For detailed conductor range information, please see page 33 (L11557).

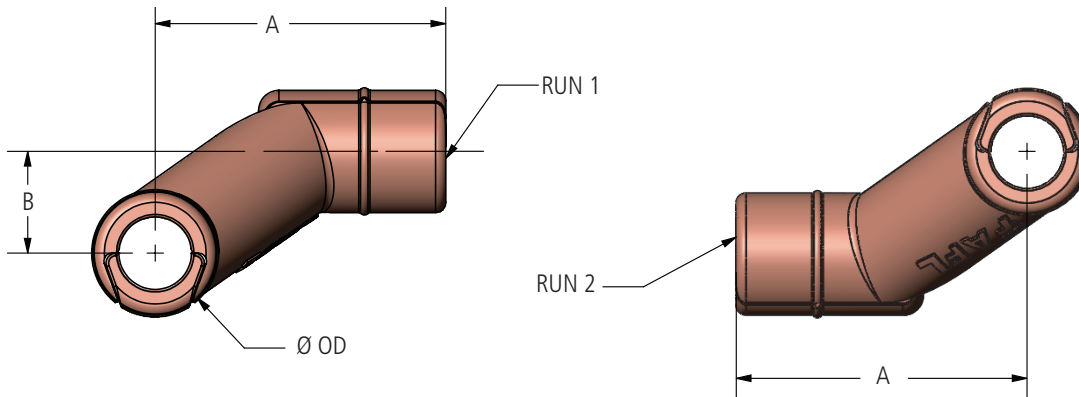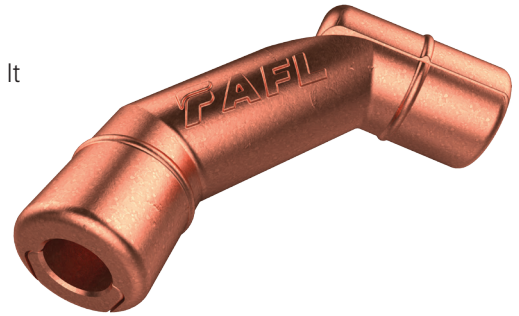

Ordering Information

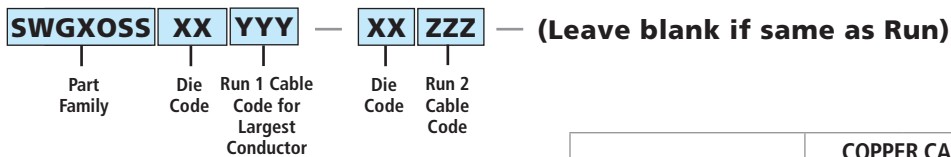

Die Code comes from maximum connector OD from Table at right.

- EX: Tin plated offset split cross for 250MCM Cu to 500MCM Cu is SWGXOSS2425-2450-SN
- EX: Offset split cross for 250MCM Cu to 250MCM is SWGXOSS2025

AFL NO.	COPPER CABLE (AWG OR KCMIL)		DIMENSIONS IN INCHES			DIE SIZE
	RUN 1	RUN 2	OD	A	B	
SWGROSS2013	1/0-2/0	1/0-2/0	1.25	3.20	1.00	45TD20
SWGROSS2017	3/0	3/0	1.25	3.20	1.00	45TD20
SWGROSS2017-2025	3/0	250	1.25	3.20	1.00	45TD20
SWGROSS2021	4/0	4/0	1.25	3.20	1.00	45TD20
SWGROSS2021-2025	4/0	250	1.25	3.20	1.00	45TD20
SWGROSS2025-2013	250	1/0-2/0	1.25	3.20	1.00	45TD20
SWGROSS2025	250	250	1.25	3.20	1.00	45TD20
SWGROSS2421-2450	4/0	500	1.50	3.57	1.25	45TD24
SWGROSS2425-2450	250	500	1.50	3.57	1.25	45TD24
SWGROSS2430-2425	300	250	1.50	3.57	1.25	45TD24
SWGROSS2430	300	300	1.50	3.57	1.25	45TD24
SWGROSS2435-2425	350	250	1.50	3.57	1.25	45TD24
SWGROSS2435	350	350	1.50	3.57	1.25	45TD24
SWGROSS2450	500	500	1.50	3.57	1.25	45TD24