

TYPE SWGEH Swage Alternate Elbow


A swage type alternate elbow connector is used to connect a cable/rod to another cable or rod.

Material


Copper Alloy

Notes

- For tin plating, add "-SN" to end of catalog number EX: SWGEH2450-SN
- For detailed conductor range information, please see page 33 (L11557).

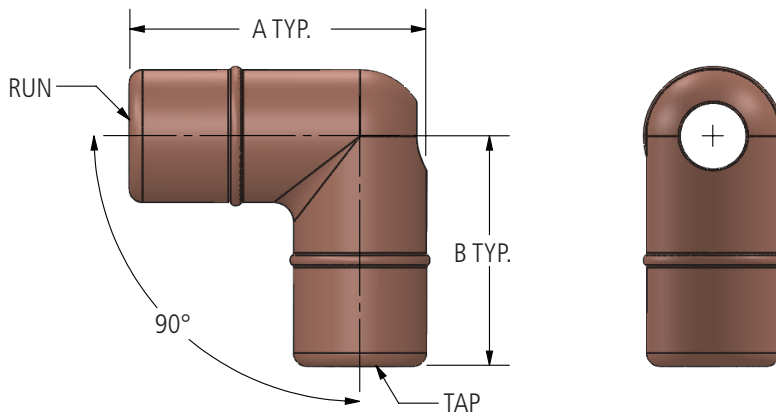

Ordering Information

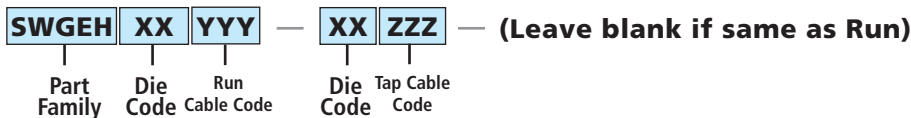

Die Code comes from maximum connector OD from Table at right.

- EX: Tin plated alternate elbow for 500MCM Cu to 250MCM Cu is SWGEH2450-2425-SN
- EX: Alternate elbow for 500MCM Cu to 250MCM is SWGEH2450-2425

AFL NO.	CABLE RANGE		DIMENSIONS IN INCHES		DIE SIZE
	RUN	TAP	A	B	
SWGEH2013-2035	1/0	5/8" ROD	2.80	2.17	45TD20
SWGEH2013		1/0 2/0	2.80	2.17	45TD20
SWGEH2017	3/0	3/0	2.80	2.17	45TD20
SWGEH2017-2035		5/8" ROD	2.80	2.17	45TD20
SWGEH2021-2013	4/0	1/0 2/0	2.80	2.17	45TD20
SWGEH2021		4/0	2.80	2.17	45TD20
SWGEH2021-2045	250	3/4" ROD	2.80	2.17	45TD20
SWGEH2025-206		#2	2.80	2.17	45TD20
SWGEH2025		250	2.80	2.17	45TD20
SWGEH2025-2035		5/8" ROD	2.80	2.17	45TD20
SWGEH2025-2045	5/8" ROD	3/4" ROD	2.80	2.17	45TD20
SWGEH2035-2021		4/0	2.80	2.17	45TD20
SWGEH2035-2025	4/0	250	2.80	2.17	45TD20
SWGEH2421		4/0	3.05	2.30	45TD24
SWGEH2421-2435	500	5/8" ROD	3.05	2.30	45TD24
SWGEH2450-2425		250	3.05	2.30	45TD24
SWGEH2450-2445	500	3/4" ROD	3.05	2.30	45TD24
SWGEH2450		500	3.05	2.30	45TD24