


NEW
eABF SWR

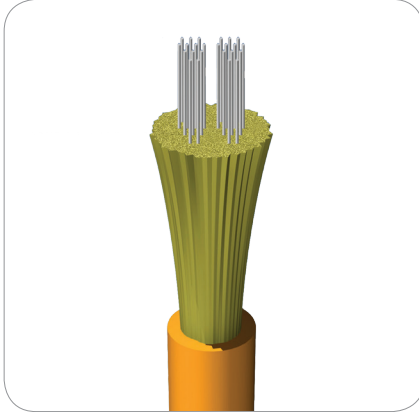

eABF® SWR® Enterprise Air-Jetted Fiber Cable


The AFL eABF SWR (SpiderWeb Ribbon®) is a new innovation that combines the best of ribbon fiber mass-fusion functionality and single fiber-bundle packing density to enterprise fiber optic structured cabling materials. The SWR fiber bundle used in this version of the eABF air-jetted fiber optic cable allows for the design of round, high-fiber density geometry yet offers the installer the ability to quickly and efficiently install MPO multi-fiber connectors or mass-fusion splicing without having to sort out and arrange individual fibers. In addition, because of SWR fiber binding system, the individual optical fibers can be easily separated and terminated as single fiber units.

The eABF SWR cable meets the interconnect standards of Telcordia GR-409 and is rated to meet NFPA/NEC flame-safety requirements as a stand-alone cable yet can be jetted thousands of feet in the Dura-Line FuturePath MicroDuct pathway system.

Features


- 24, 48, 72 and 144 fiber options increase design flexibility without increasing space or installation time (labor costs) requirements
- NFPA/NEC Riser and Plenum options for use in riser or plenum pathway environments (outside of micro-duct)
- Innovative fiber-ribbon bonding allows for higher density cable than traditional flat, fiber-ribbon
- SpiderWeb Ribbon technology reduces cable diameter to improve pathway space and cooling channel efficiencies
- Telcordia GR-409 Interconnect-compliant means cable can be routed within cable management pathways (outside of micro-duct)
- TIA and IEC/ISO OM3, OM4 and single-mode optical fiber options which support easy migration to IEEE 802.3ba 40GbE and 100GbE applications
- Optimized for high-density terminations for excellent integration with MPO-based and mass-fusion spliced connectivity solutions
- Compliant to Directive 2002/95/EC (RoHS) – environment-safe materials reduces concern for handling of cables
- Cables can be de-installed and reused to meet LEED-design guidelines for green building initiatives

SWR Technology

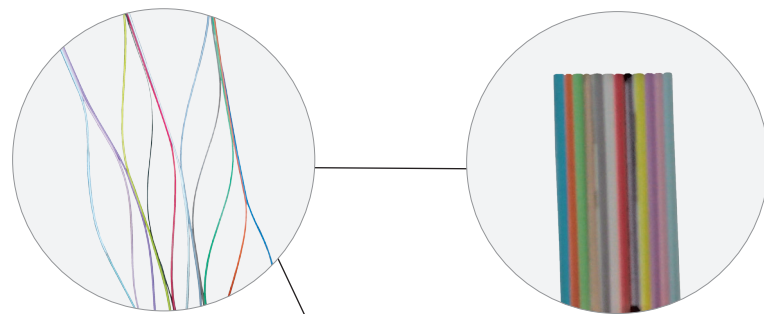


Cable Components

aramid yarn
coated fiber
outer jacket



24 Fiber eABF SWR



48 Fiber eABF SWR

eABF® SWR® Enterprise Air-Jetted Fiber Cable

Temperature Specifications

TEMPERATURE RANGE	
OPERATING/INSTALLATION	STORAGE
0°C to +70°C	-40°C to +75°C

Ordering Information and Mechanical Data

DURA-LINE NO.	DESCRIPTION	FIBER TYPE	FIBER COUNT	NOMINAL DIAMETER	WEIGHT	MAXIMUM TENSILE LOAD LBS (N)		MINIMUM BEND RADIUS INCHES (MM)	
				INCHES (MM)	LBS/KFT (KG/KM)	SHORT TERM	LONG TERM	SHORT TERM	LONG TERM
PLENUM									
20003374	MicroCable SWR Plenum ENT-A SMF-SWR-24	SMF-SWR	24	0.14 (3.5)	5.5 (8.2)	22 (100)	7 (30)	2.0 (56)	1.5 (35)
20003375	MicroCable SWR Plenum ENT-A OM3-SWR-24	OM3-SWR	24	0.14 (3.5)	5.5 (8.2)	22 (100)	7 (30)	2.0 (56)	1.5 (35)
20003376	MicroCable SWR Plenum ENT-A OM4-SWR-24	OM4-SWR	24	0.14 (3.5)	5.5 (8.2)	22 (100)	7 (30)	2.0 (56)	1.5 (35)
20003306	MicroCable SWR Plenum ENT-A SMF-SWR-48	SMF-SWR	48	0.16 (4.0)	5.9 (8.8)	22 (100)	7 (30)	2.5 (60)	1.5 (35)
20003307	MicroCable SWR Plenum ENT-A OM3-SWR-48	OM3-SWR	48	0.16 (4.0)	5.9 (8.8)	22 (100)	7 (30)	2.5 (60)	1.5 (35)
20003308	MicroCable SWR Plenum ENT-A OM4-SWR-48	OM4-SWR	48	0.16 (4.0)	5.9 (8.8)	22 (100)	7 (30)	2.5 (60)	1.5 (35)
RISER									
20003425	MicroCable Riser ENT-SWR SM-24	SMF-SWR	24	0.14 (3.5)	5.5 (8.2)	22 (100)	7 (30)	2.0 (56)	1.5 (35)
20003424	MicroCable Riser ENT-SWR OM3-24	OM3-SWR	24	0.14 (3.5)	5.5 (8.2)	22 (100)	7 (30)	2.0 (56)	1.5 (35)
20003428	MicroCable Riser ENT-SWR OM4-24	OM4-SWR	24	0.14 (3.5)	5.5 (8.2)	22 (100)	7 (30)	2.0 (56)	1.5 (35)
20003303	MicroCable Riser ENT-SWR SM-48	SMF-SWR	48	0.16 (4.0)	5.9 (8.8)	22 (100)	7 (30)	2.5 (60)	1.5 (35)
20003304	MicroCable Riser ENT-SWR OM3-48	OM3-SWR	48	0.16 (4.0)	5.9 (8.8)	22 (100)	7 (30)	2.5 (60)	1.5 (35)
20003305	MicroCable Riser ENT-SWR OM4-48	OM4-SWR	48	0.16 (4.0)	5.9 (8.8)	22 (100)	7 (30)	2.5 (60)	1.5 (35)
20003446	MicroCable SWR Riser ENT-A OM3-SWR-72	OM3-SWR	72	0.18 (4.5)	6.3 (9.4)	22 (100)	7 (30)	2.7 (67)	1.8 (45)
20003447	MicroCable SWR Riser ENT-A OM4-SWR-72	OM4-SWR	72	0.18 (4.5)	6.3 (9.4)	22 (100)	7 (30)	2.7 (67)	1.8 (45)
20003448	MicroCable SWR Riser ENT-4 SMF-SWR-72	SMF-SWR	72	0.18 (4.5)	6.3 (9.4)	22 (100)	7 (30)	2.7 (67)	1.8 (45)
20003882	MicroCable Riser ENT-SWR SM-144	SMF-SWR	144	0.32 (8.0)	56 (83)	22 (100)	7 (30)	7 (160)	4 (80)

AFL/DURA-LINE eABF CABLE

Optical Specifications

FIBER TYPE	MAXIMUM ATTENUATION (DB/KM)			OVERFILL LAUNCH MIN. BANDWIDTH (MHZ•KM)		EMB _c (MHZ•KM)	GIGABIT ETHERNET MIN. LINK DISTANCE (METERS)		10 GIGABIT ETHERNET MIN. LINK DISTANCE (METERS)	
	850 NM	1300 NM	1550 NM	850 NM	1300 NM		850 NM	1300 NM	850 NM	1300 NM
OM3	3.0	1.2	N/A	1500	500	2000	1000	550	300	—
OM4	3.0	1.2	N/A	3500	550	4700	1040	550	550	—
OS2	N/A	0.5	0.5	N/A	N/A	N/A	N/A	5000	N/A	10000

Tested to meet or exceed EIA/TIA 568-B3 / Telcordia GR-409-CORE