

## Optical Terminators


Optical terminators are used to terminate unused connector ports in fiber optic systems so that unwanted reflections are not introduced back into the system. All AFL optical terminators feature zirconia ferrules for long life and durability.

### Specifications

PARAMETER	VALUE
Reflectance	<-55 dB (ultra polish)
Reflectance	<-60 dB (angle polish)
Operating Temperature	-40°C to +85°C
Operating Wavelength	1260 nm to 1580 nm

### Ordering Information

DESCRIPTION	AFL NO.
SC/UP Terminator	C067393
SC/AP Terminator	C148828
FC/UP Terminator	C067407
FC/AP Terminator	C082562
ST/UP Terminator	C167083
LC/UP Terminator	CS000637
LC/AP Terminator	CS000638

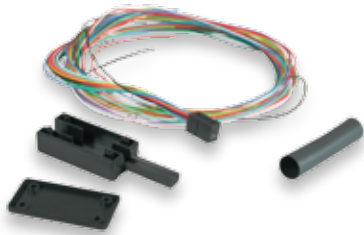

## Fanout Kits

Fanout kits route 250  $\mu$ m fiber into 900  $\mu$ m tubes ready for connectorization. Easily installed in minutes, these kits require no special tools. Color-coded tubing allows easy identification. The furcation unit snaps together, eliminating epoxy. Loose tube fanout kits are available in 6 and 12 fiber configurations.

### Ordering Information

CABLE TYPE	FIBER COUNT	LENGTH	AFL NO.
Loose Tube Fanout Kit (for 3.0 mm tube)	6 Fibers	24 inches	C189826
Loose Tube Fanout Kit (for 3.0 mm tube)	12 Fibers	24 inches	C189818
Ribbon-Link® Fanout Kit	6 Fibers	36 inches	C189842
Ribbon-Link Fanout Kit	12 Fibers	36 inches	C189834
Uni-Tube Fanout Kit	6 Fibers	36 inches	C193114
Uni-Tube Fanout Kit	12 Fibers	36 inches	C193122