

## CS260-10 Contractor Series Live PON OTDR



### Features

- Filtered OTDR detector enables OTDR measurements on in-service PON
- Integrated PON Power Meter measures downstream signal levels
- Optional LinkMap upgrade for easy results interpretation
- 35 dB dynamic range @ 1625 nm
- 0.8 m event, and 3.5 m attenuation dead zones
- Auto, Expert, PON, and Real Time OTDR modes
- Integrated Visual Fault Locator (VFL)
- Rugged, hand-held and lightweight
- High-contrast display easily viewed indoors or out
- >12-hour operation, fast charge, Li-Ion battery
- Instant On; Ready to test in <5 sec
- Easy to learn and use

The CS260-10 Contractor Series Live PON OTDR is an ideal tool for fiber optic technicians installing, activating and troubleshooting FTTx PON distribution and drop fibers from the splitter to the ONT.

The CS260-10 provides an out-of-band 1625 nm OTDR with filtered detector, enabling Live PON testing without disrupting service on an active PON. It additionally includes an integrated PON power meter to automatically detect and measure downstream 1490 and 1550 nm signal levels.

The CS260-10 is also suitable for out-of-service testing. As longer wavelengths are more sensitive to bending losses, the CS260-10 OTDR will detect excess losses induced by micro- or macro-bends.

The CS260-10 provides extremely short event and attenuation dead zones (0.8 and 3.5 m, respectively), enabling closely spaced events to be detected and measured in distribution and drop fibers. With 35 dB dynamic range, the CS260-10 is able to test through PON splitters having split ratios up to 1x64, enabling detection of poor splices or excess bending losses at the splitter.

Add optional new LinkMap® upgrade to simplify results interpretation. LinkMap displays the tested network using colored icons to represent passing or failing connectors, splices, splitters, and faults.

To further aid in locating faults within access points, splice closures or indoor cabling, the CS260-10 includes an integrated Visual Fault Locator (visible red laser).

The CS260-10 is extremely easy to use. It provides fully automatic OTDR parameter selection, automatic event table generation, and end-to-end length, loss and ORL summary. For expert users, the CS260-10 also allows full control of OTDR parameters (range, pulse width, averaging time, etc.).

Over 1000 OTDR test results may be saved in industry-standard .SOR file format. Stored OTDR results may be transferred to PC via USB port for viewing, analysis, and professional report generation using included Windows® compatible TRM® 2.0 Basic Test Results Manager software.

### Applications

- **Verify FTTx PON fiber installations:** Measure loss and reflectance of individual splices, connectors and splitters, as well as end-to-end length, loss and optical return loss.
- **Troubleshoot Live PONs:** Verify downstream PON power levels. Locate source(s) of excess loss or reflectance in distribution or drop fibers on in-service FTTx PON using out-of-band 1625 nm Live PON OTDR with filtered detector.
- **Visibly trace fibers or locate fiber bends or breaks:** Use integrated VFL visible red laser to visibly detect light emanating from fiber breaks or macrobends.

## CS260-10 Contractor Series Live PON OTDR

### Specifications <sup>a</sup>

| <b>OTDR (PON, LIVE PON, OR POINT-TO-POINT)</b> |   |
|--|---|
| Emitter Type                                   | Laser   |
| Safety Class                                   | Class 1 FDA 21 CFR 1040.10 and 1040.11, IEC 60825-1: 2007-03                                    |
| Fiber Type                                     | Single-mode   |
| Wavelength                                     | 1625 nm ±10 nm  |
| Dynamic Range (SNR=1) <sup>b</sup>             | 35 dB   |
| Event Dead Zone <sup>c</sup>                   | 0.8 m   |
| Attenuation Dead Zone <sup>d</sup>             | 3.5 m   |
| Pulse widths                                   | 5, 10, 30, 100, 300 ns; 1, 3, 10 μs   |
| Range Settings                                 | 250 m to 120 km   |
| Data Points                                    | Up to 30,000  |
| Data Point Spacing                             | 5.0 cm (range <1.5 km); Range/30,000 (range >1.5 km)  |
| Group Index of Refraction                      | 1.4000 to 1.6000  |
| Distance Uncertainty (m)                       | ±(1 +0.005 % x distance + data point spacing)   |
| Linearity                                      | ±0.05 dB/dB   |
| Trace File Format                              | Bellcore GR-196 v1.1  |
| Trace File Storage                             | Internal memory (>1000 traces)  |
| Data Transfer to PC                            | USB cable   |
| PON OTDR Modes                                 | FTTx – In Service; FTTx PON Construction, Expert, Real Time                                     |
| Standard OTDR Modes                            | Full Auto, Expert, Real Time  |
| <b>PON POWER METER</b>                         |   |
| Calibrated Wavelengths                         | 1490, 1550 nm   |
| Detector Type                                  | Filtered InGaAs   |
| Isolation                                      | >40 dB  |
| Measurement Range                              | +23 to -50 dBm  |
| Accuracy <sup>e</sup>                          | ±0.5 dB   |
| Resolution                                     | 0.01 dB   |
| Measurement Units                              | dBm or Watts (nW, μW, mW)   |
| <b>VISUAL FAULT LOCATOR (VFL)</b>              |   |
| Emitter Type                                   | Laser; 650 nm ±20 nm  |
| Safety Class                                   | Class II FDA 21 CFR 1040.10 and 1040.11, IEC 60825-1: 2007-03                                   |
| Output Power (nominal)                         | 0.8 mW into single-mode fiber   |
| Modes  | CW, 2 Hz flashing   |
| <b>GENERAL</b>                                 |   |
| Size (in boot)                                 | 20.1 x 13.0 x 5.3 cm (7.9 x 5.1 x 2.1 in)   |
| Weight   | 0.8 kg (1.8 lb)   |
| Operational Temperature                        | -10°C, to +50°C, 0 to 95 % RH (non-condensing)  |
| Storage Temperature                            | -20°C, to +60°C, 0 to 95 % RH (non-condensing)  |
| Power  | Rechargeable Li-Ion or AC adapter   |
| Battery Life                                   | 13.5 hours, Telcordia test conditions; 12.5 hours, backlight on, continuous test                |
| Display  | LCD, 320 x 240, 3.5 in (89 mm), color, high-contrast transfective with backlight and AR coating |

#### Notes:


- All specifications valid at 25°C unless otherwise specified.
- Typical dynamic range measured using 10 μs pulse width with 3 minutes averaging.
- Typical distance between the two points 1.5 dB down each side of a reflective spike caused by a -45 dB event using 5 ns pulse width.
- Typical distance from the location of a -45 dB reflective event to point where trace falls and stays within 0.5 dB of backscatter, using a 5 ns pulse width.
- At calibration wavelengths and power levels of approximately -5 dBm for 1550 nm and -10 dBm for 1490 nm.

## CS260-10 Contractor Series Live PON OTDR

### Ordering Information

The CS260-10 comes with a soft carry case, user-specified connector adapters for OTDR and VFL ports, USB cable (connects with Type A USB port on your PC), AC power adapter with a country-specific power cord, rechargeable replaceable Li-Ion battery, and TRM® 2.0 Basic Test Results Manager software for PC-based trace viewing and report generation. When placing an order, select options as follows: OTDR port ferrule type (F), connector adapter (CA), Language Pack (LLL)\*, country-specific Power Cord (PC).

Example: CS260-10U-SC-ENG-01 indicates a CS260-10 1625 nm Live PON OTDR with UPC port ferrule, SC OTDR connector adapter, 2.5 mm Universal VFL adapter, English/Euro language pack, quick reference guide in English, and US power cord.

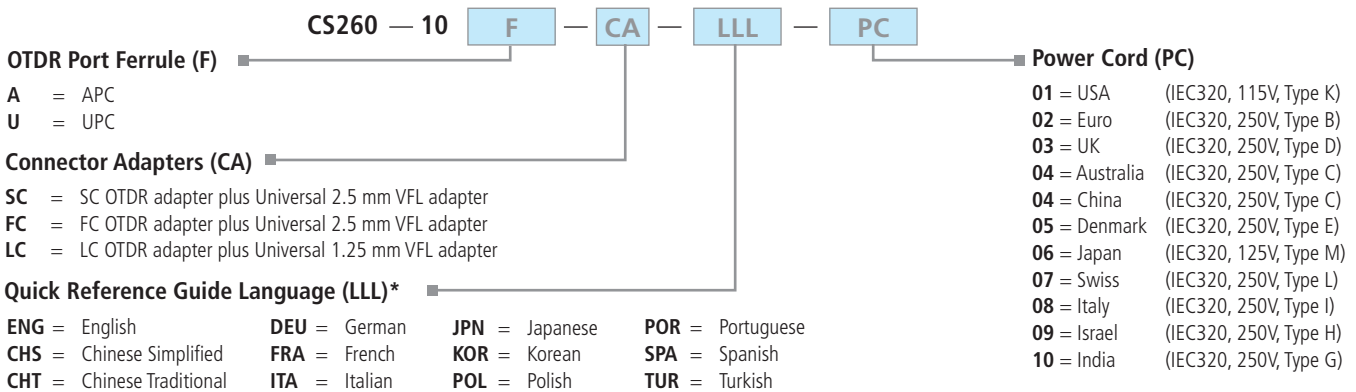

\* All CS260-10 models are shipped with the user-specified quick reference guide and language pack installed.

### Available Accessories

| DESCRIPTION                                     | AFL NO.                           |
|---|-----------------------------------|
| LinkMap upgrade for CS260-10                    | CS260-10-LM                       |
| Standard, 1 single-mode fiber, 150 m (492 ft)   | FR1-SM-150-y1-y2 <sup>a, b</sup>  |
| Standard, 1 single-mode fiber, 500 m (1640 ft)  | FR1-SM-500-y1-y2 <sup>a, b</sup>  |
| Standard, 1 single-mode fiber, 1000 m (3280 ft) | FR1-SM-1000-y1-y2 <sup>a, b</sup> |
| FC adapter for OTDR port                        | 2900-50-0002MR                    |
| SC adapter for OTDR port                        | 2900-50-0003MR                    |
| ST adapter for OTDR port                        | 2900-50-0004MR                    |
| LC adapter for OTDR port                        | 2900-50-0006MR                    |
| 2.5 mm Universal adapter for VFL port           | 2900-53-0001MR                    |
| 1.25 mm Universal adapter for VFL port          | 2900-53-0002MR                    |
| Universal flip-top dust cap for UCI outputs     | 8800-00-0072MR                    |
| Upgrade TRM 2.0 Basic to TRM 2.0 Advanced       | TRM-00-0920                       |

**Notes:**

- a. y1, y2 – connectors for single-mode cables, specify type as follows: ST, SC, ASC (angled SC), FC, AFC (angled FC), LC.
- b. Other connector types, fiber types, and fiber lengths quoted upon request.



### International Sales and Service Contact Information

Available at [www.AFLglobal.com/Test/Contacts](http://www.AFLglobal.com/Test/Contacts)