

## DOSSERT®

### TYPE GCF

#### Ground Connector For Rotating Pipe To A Flat Surface

A flexible ground connector for grounding a rotating pipe or rod to a flat surface. Finds wide application in grounding switch operating pipes and fence gates.

TYPE GCG modification is for grounding one pipe or rod to another.

#### Material


- Copper Alloy
- Braid is tin plated copper wire, terminated at each end by a non-plated pad.

#### Hardware


Everdur bolts, nuts and lockwashers

#### Note

Braid may be custom made for any configuration of length, pad size or hole diameter.

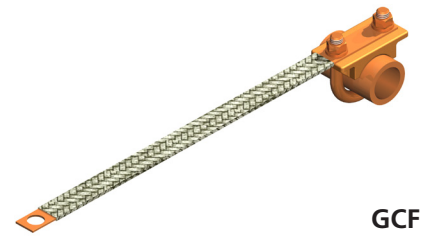

GCF

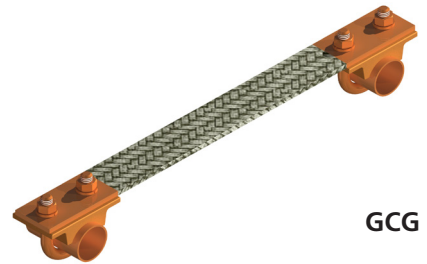


GCG

Bronze Grounding Connectors and Everdur Hardware



GCG

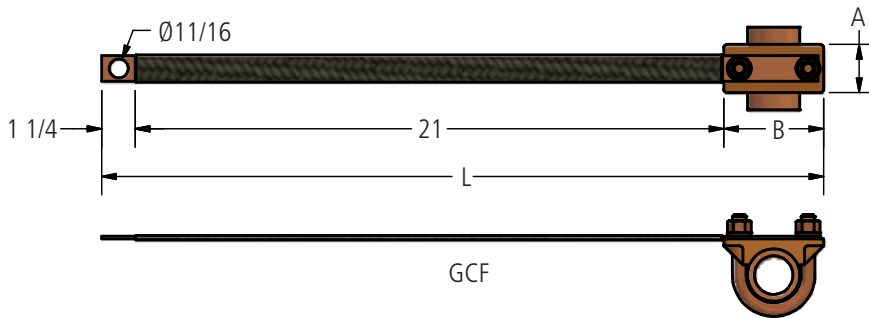

GCF

### Ordering Information

CATALOG NUMBER	GROUNDING SPS	AMP CAPACITY OF BRAID	DIMENSIONS IN INCHES			BOLT SIZE
			A	B	L	
GCF75-771	3/4	180	1	2 11/16	24 15/16	3/8
GCF75-2301	3/4	350	1 1/2	2 11/16	24 15/16	3/8
GCF75-3021	3/4	410	1 1/2	2 11/16	24 15/16	3/8
GCF100-771	1	180	1	2 15/16	25 3/16	3/8
GCF100-2301	1	350	1 1/2	2 15/16	25 3/16	3/8
GCF100-3021	1	410	1 1/2	2 15/16	25 3/16	3/8
GCF125-771	1 1/4	180	1	3 1/4	25 1/2	3/8
GCF125-2301	1 1/4	350	1 1/2	3 1/4	25 1/2	3/8
GCF125-3021	1 1/4	410	1 1/2	3 1/4	25 1/2	3/8
GCF150-771	1 1/2	180	1	3 1/2	25 3/4	3/8
GCF150-2301	1 1/2	350	1 1/2	3 1/2	25 3/4	3/8
GCF150-3021	1 1/2	410	1 1/2	3 1/2	25 3/4	3/8
GCF200-771	2	180	1	4	26 1/4	3/8
GCF200-2301	2	350	1 1/2	4	26 1/4	3/8
GCF200-3021	2	410	1 1/2	4	26 1/4	3/8
GCF250-771	2 1/2	180	1	4 1/2	26 3/4	3/8
GCF250-2301	2 1/2	350	1 1/2	4 1/2	26 3/4	3/8
GCF250-3021	2 1/2	410	1 1/2	4 1/2	26 3/4	3/8