

TYPE SWGTOS Swage Offset Single Split Tee



A Swage type offset single split tee connector used to connect a cable run to another cable. It features a sliding channel for ease of installation.

Material

Copper Alloy

Notes

- For tin plating, add "-SN" to end of catalog number. EX: SWGTOS2025-SN.
- For detailed conductor range information, please see page 33 (L11557).

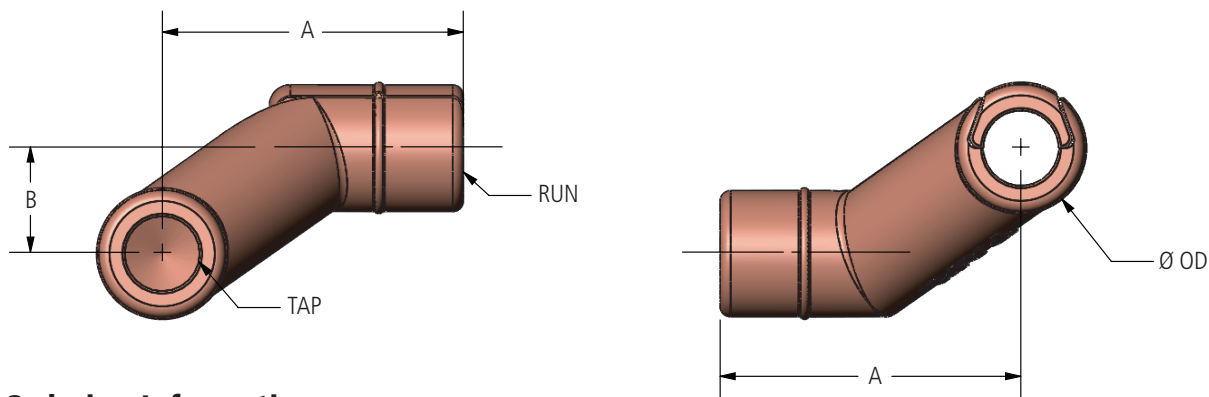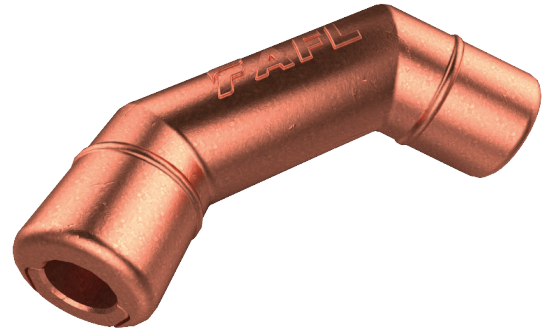

Ordering Information

SWGTOS
XX
YYY
—
XX
ZZZ
— (Leave blank if same as Run)

Part Family Die Code Run 1 Cable Code for Largest Conductor Die Code Run 2 Cable Code

Die Code comes from maximum connector OD from Table at right.

- EX: Tin plated offset split tee for 250MCM Cu to 500MCM Cu is SWGTOS2450-2425-SN
- EX: Offset split tee for 250MCM Cu to 250MCM is SWGTOS2025

AFL NO.	COPPER CABLE		DIMENSIONS IN INCHES			DIE SIZE
	RUN	TAP	OD	A	B	
SWGTOS2013	1/0-2/0	1/0-2/0	1.25	3.20	1.00	45TD20
SWGTOS2013-2035	1/0-2/0	350	1.25	3.20	1.00	45TD20
SWGTOS2017	3/0	3/0	1.25	3.20	1.00	45TD20
SWGTOS2017-2025	3/0	250	1.25	3.20	1.00	45TD20
SWGTOS2021-2013	4/0	1/0-2/0	1.25	3.20	1.00	45TD20
SWGTOS2021	4/0	4/0	1.25	3.20	1.00	45TD20
SWGTOS2021-2035	4/0	350	1.25	3.20	1.00	45TD20
SWGTOS2021-2062S	4/0	5/8" Rod	1.25	3.20	1.00	45TD20
SWGTOS2021-2075CC	4/0	3/4" Cu Rod	1.25	3.20	1.00	45TD20
SWGTOS2025-202	250	#6	1.25	3.20	1.00	45TD20
SWGTOS2025-206	250	#2	1.25	3.20	1.00	45TD20
SWGTOS2025-2013	250	1/0-2/0	1.25	3.20	1.00	45TD20
SWGTOS2025	250	250	1.25	3.20	1.00	45TD20
SWGTOS2025-2035	250	350	1.25	3.20	1.00	45TD20
SWGTOS2025-2075CC	250	3/4" Cu Rod	1.25	3.20	1.00	45TD20
SWGTOS2430-2425	300	250	1.50	3.57	1.25	45TD24
SWGTOS2435	350	350	1.50	3.57	1.25	45TD24
SWGTOS2450-2425	500	250	1.50	3.57	1.25	45TD24
SWGTOS2450-2430	500	300	1.50	3.57	1.25	45TD24
SWGTOS2450-2435	500	350	1.50	3.57	1.25	45TD24
SWGTOS2450-2440	500	400	1.50	3.57	1.25	45TD24
SWGTOS2450	500	500	1.50	3.57	1.25	45TD24