

Non-Armored OSP Loose Tube (LE Series SJ)

Acting as the backbone for most of today's fiber based systems, stranded fiber optic cables play a critical role in the high speed network. AFL's Non-Armored Loose Tube fiber optic cables are designed to provide high fiber counts up to 432, which offers the flexibility and versatility required for today's standard installations.


Features

- Up to 432 fibers in cable
- Compact design
- Gel-filled tubes are reverse-oscillated (SZ stranded) to allow slack for mid-span access

Applications

- Distribution
- Underground Duct
- Long Haul Networking
- Building Interconnections (Campus LAN)
- Trunking Lines Direct to Telecommunications Closet
- Local Loop
- Distance Learning
- Intra-building Backbone

Cable Components

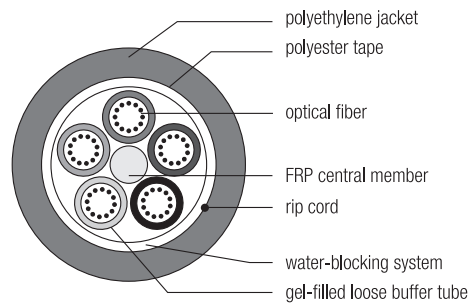

Typical Lengths

FIBER COUNT	MAXIMUM LENGTHS*			
	SINGLE-MODE		MULTIMODE	
	FEET	METERS	FEET	METERS
6 - 60	22,900	7,000	22,900	7,000
72 - 96	22,900	7,000	22,900	7,000
108 - 120	22,900	7,000	22,900	7,000
132 - 144	22,900	7,000	22,900	7,000
146 - 216	22,900	7,000	22,900	7,000
218 - 288	16,400	5,000	16,400	5,000
290 - 432	14,100	4,300	14,000	4,300

* Longer lengths may be available upon request.

Fiber Specifications

FIBER TYPE	MAXIMUM ATTENUATION (DB/KM)				OVERFILL LAUNCH MIN. BANDWIDTH (MHZ•KM)		GIGABIT ETHERNET MIN. LINK DISTANCE (METERS)	
	850 NM	1300 NM	1310 NM	1550 NM	850 NM	1300 NM	850 NM	1300 NM
(6) 62.5/125 GIGA-Link™ 300	3.5	1.2	N/A	N/A	200	600	300	550
(5) 50/125 GIGA-Link™ 600	2.9	0.9	N/A	N/A	500	500	600	600
(L) 50/125 Laser-Link™ 300	2.9	0.9	N/A	N/A	1500	500	900	550
(9) Single-mode	N/A	N/A	0.35	0.25	N/A	N/A	N/A	5000
(Q) Non-zero Dispersion-shifted Single-mode	N/A	N/A	N/A	0.25	N/A	N/A	N/A	N/A

Gigabit Ethernet Minimum Link Distances are based on "bandwidth"/modal dispersion constraints. Actual link distances may be constrained by attenuation, depending on specific loss budget.

Non-Armored OSP Loose Tube (LE Series SJ)

Ordering Information

AFL NO.	FIBER COUNT	NUMBER OF TUBES/FIBERS	NOMINAL DIAMETER		NOMINAL WEIGHT		MAX. TENSILE LOAD		MIN. BEND RADIUS	
			INCHES	MM	LBS/1,000FT	KG/KM	LBS (N)		INCHES (CM)	
							SHORT TERM	LONG TERM	SHORT TERM	LONG TERM
LE006★C5101N1	6	1w/6 (4 fillers)	0.41	10.5	56	83	600 (2670)	200 (890)	8.2 (21)	6.2 (16)
LE012★C5101N1	12	1w/12 (4 fillers)	0.41	10.5	56	84	600 (2670)	200 (890)	8.2 (21)	6.2 (16)
LE018★C5101N1	18	1w/12, 1w/6 (3 fillers)	0.41	10.5	57	85	600 (2670)	200 (890)	8.2 (21)	6.2 (16)
LE024★C5101N1	24	2w/12 (3 fillers)	0.41	10.5	57	85	600 (2670)	200 (890)	8.2 (21)	6.2 (16)
LE030★C5101N1	30	2w/12, 1w/6 (2 fillers)	0.41	10.5	58	86	600 (2670)	200 (890)	8.2 (21)	6.2 (16)
LE036★C5101N1	36	3w/12 (2 fillers)	0.41	10.5	58	86	600 (2670)	200 (890)	8.2 (21)	6.2 (16)
LE048★C5101N1	48	4w/12 (1 filler)	0.41	10.5	59	87	600 (2670)	200 (890)	8.2 (21)	6.2 (16)
LE060★C5101N1	60	5w/12 (no fillers)	0.41	10.5	60	89	600 (2670)	200 (890)	8.2 (21)	6.2 (16)
LE072★C6101N1	72	6w/12 (no fillers)	0.45	11.5	71	106	600 (2670)	200 (890)	9.0 (22)	6.8 (17)
LE084★C8101N1	84	7w/12 (1 filler)	0.52	13.3	90	135	600 (2670)	200 (890)	10.4 (27)	7.8 (20)
LE096★C8101N1	96	8w/12 (no fillers)	0.52	13.3	91	136	600 (2670)	200 (890)	10.4 (27)	7.8 (20)
LE108★CA101N1	108	9w/12 (1 filler)	0.59	15.1	117	174	600 (2670)	200 (890)	11.8 (31)	8.9 (22)
LE120★CA101N1	120	10w/12 (no fillers)	0.59	15.1	118	175	600 (2670)	200 (890)	11.8 (31)	8.9 (22)
LE132★CC101N1	132	11w/12 (1 filler)	0.67	17.0	147	219	600 (2670)	200 (890)	13.4 (34)	10.1 (26)
LE144★CC101N1	144	12w/12 (no fillers)	0.67	17.0	148	220	600 (2670)	200 (890)	13.4 (34)	10.1 (26)
LE216★CI301N1	216	18w/12 (no fillers)	0.69	17.4	150	224	600 (2670)	200 (890)	14.0 (35)	10.4 (26)
LE288★OC101N1	288	12w/24 (no fillers)	0.67	17.0	151	225	600 (2670)	200 (890)	13.4 (34)	10.1 (26)
LE432★OI301N1	432	18w/24 (no fillers)	0.66	16.8	149	222	600 (2670)	200 (890)	13.2 (34)	9.9 (25)

Note: Diameter and weight subject to change without notice

★ Fiber Types – Replace asterisk (★) in AFL number with number in the Fiber Specifications table on previous page.

Reel Information

ITEM	REEL A		REEL B		REEL C		REEL D		REEL E	
	INCHES	CM	INCHES	CM	INCHES	CM	INCHES	CM	INCHES	CM
Reel Height	42	106.7	58	147.3	66	167.6	72	182.8	84	213.4
Reel Width Outside	36	91.4	38	96.5	42	106.7	42	106.7	40	101.6
Reel Width Inside	32	81.6	32	81.3	36	91.4	36	91.4	34	86.4
Drum Diameter	23	58.7	28	71.1	36	91.4	36	91.4	35	88.9
Arbor Hole Diameter	3	7.9	3	7.9	3	7.9	3	7.9	3	7.9
Reel Weight With Lagging	180 lbs	82 kg	420 lbs	191 kg	685 lbs	311 kg	710 lbs	320 kg	950 lbs	431 kg

AFL typically provides Loose Tube cable on several standard sizes of non-returnable wooden reels. Non-standard reel sizes are available upon request. Larger reel sizes may be required to accommodate long cable lengths.

Qualifications

GOVERNING BODY	STANDARD CODE	COMPONENT
Telcordia	GR-20-CORE	Cable
ICEA	640	Cable
TIA	598-D	Fiber

Temperature Specifications

TEMPERATURE RANGE	
Operation	-40°C to +70°C
Storage	-40°C to +75°C
Installation	-30°C to +70°C

Contact AFL for cable designs.

Fiber Optic Cable